

AF000360 SERIES MID-POLE SMALL CELL CONCEALMENT SHROUD


4.9 CU FT VENTED NEMA 3R ENCLOSURE

Rev. A | December 2025



CONCEALMENT SOLUTIONS

Our portfolio of concealment solutions, designed to service carriers and integrators in the telecom industry, includes a variety of preconfigured options as well as custom integrations to meet customer-specific applications. RFI is able to leverage a long-standing track record and outstanding operational capabilities to fully support any project.

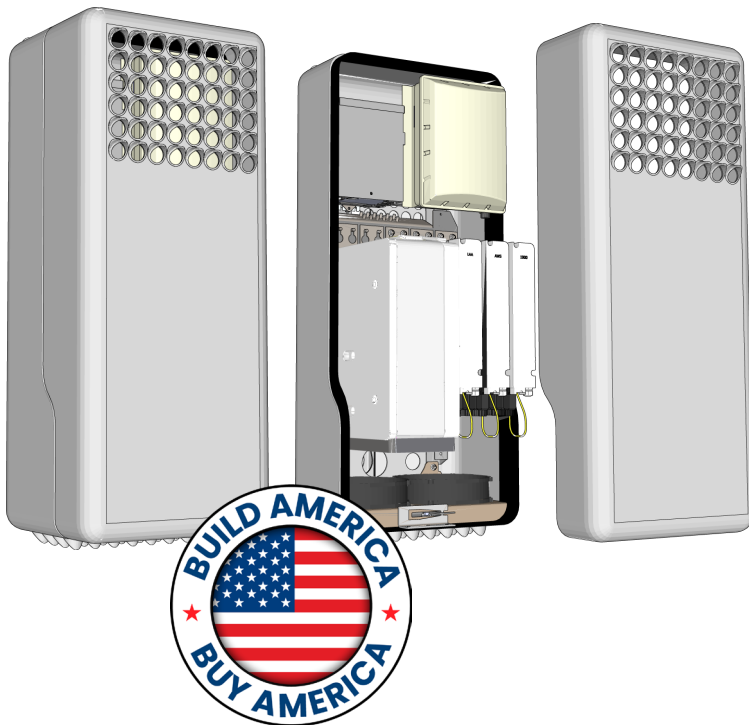


FEATURES

- 4.9 cu ft; Houses up to 4 radios
- Vented NEMA 3R enclosure
- RF transparent housing for interior antenna applications
- Removable cover to facilitate access to equipment for field servicing and radio swap/upgrade
- Carrier and municipality approvals
- Rear EMT connection cutout for power, RF cabling & fiber routing through hollow utility poles
- Secures to poles with customer supplied SS bands
- Choice of grey, black, brown and green to meet local specifications

PHYSICAL SPECIFICATIONS

Part Number	AF000360 Series
Dimensions	38"H x 16"W x 14"D
Weight (without radios)	75 lbs.
Operating Temperature Range	Min -30° C to Max 45° C*
Storage Temperature Range	Min -40° C to Max 70° C

*Subject to radio specifications

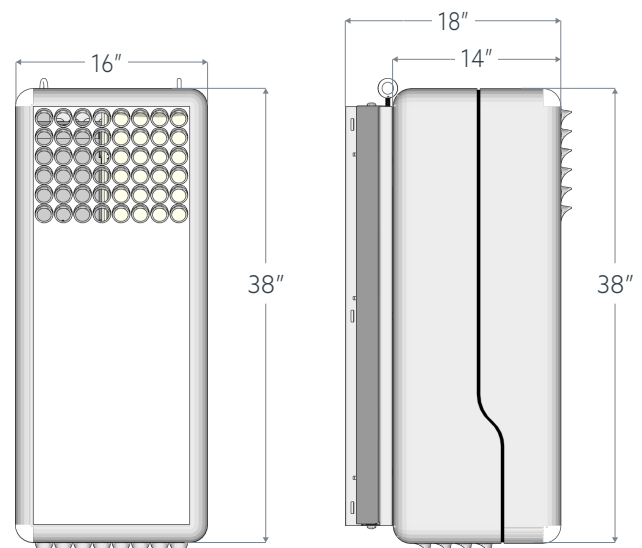

AF000360 SERIES MID-POLE SMALL CELL CONCEALMENT SHROUD

4.9 CU FT VENTED NEMA 3R ENCLOSURE

Rev. A | December 2025



INTEGRATED SOLUTIONS

Save time and cost on installation with our preconfigured radio equipment, connectivity and line power kits.

For those instances where a custom solution is required, RF Industries engineers are able to quickly develop a customized solution to meet your unique specifications. Our engineers have expertise in all four key engineering disciplines including electrical engineering, mechanical engineering, thermal engineering, and RF engineering allowing us to optimize the most robust solution into the smallest footprint.

ORDERING INFORMATION

Mid-pole shroud integrated with Nokia AWHQN, AHFB, AHIB (customer-supplied), RF cables, diplexer:

- AF000360-C: Black, hollow-pole installation
- AF000360-C-WDN: Black, wood-pole installation

Mid Pole Shroud integrated with E/// 4435 & 4402 (customer-supplied):

- AF000360-ATT-E: Black, hollow-pole installation
- AF000360-ATT-E-WDN: Black, wood-pole installation

AF000360: Shroud only.

PRECONFIGURED RADIO EQUIPMENT KITS INCLUDE

Radio Brackets	All brackets to mount equipment into shroud for a given set
Power Distribution Unit	PDU for this equipment set, incl. internal power wiring and switches
Internal RF Cabling	All internal RF cables for selected equipment if applicable
Internal Fiber Cables	All internal fiber cables for selected equipment if applicable
Cooling System	Internal cooling system (fans, temp. sensors, control) for selected equipment if applicable

Other configurations available upon request.

ABOUT RF INDUSTRIES

RF Industries (RFI) designs and manufactures a broad range of interconnect products across diversified, growing markets including wireless/wireline telecom, data communications and industrial. Our products include RF connectors, coaxial cables, data cables, wire harnesses, fiber optic cables, custom cabling, energy-efficient cooling systems and integrated small cell enclosures.

