


PART NO.

P2RFC-2279-XX

REV	DESCRIPTION	DWN	DATE	APPROVED
-	ENGINEERING RELEASE	CZS	09/30/16	JDMc

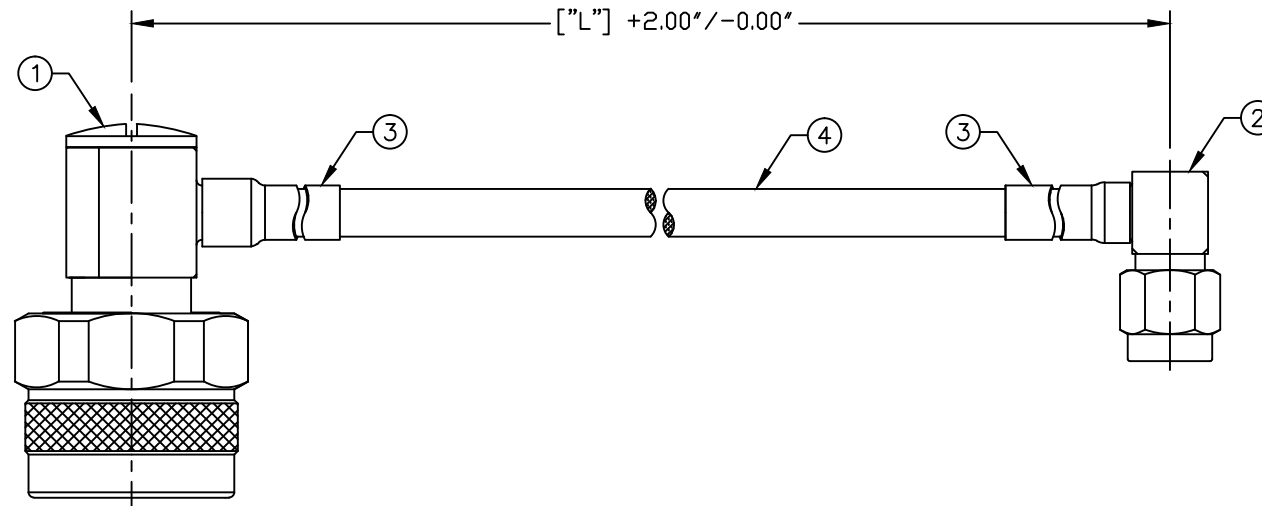

P2RFC-2279-XX

[\"L\"] LENGTH IN INCHES
CONFIGURATION ID
CABLE ASSEMBLY DESIGNATOR

SPECIFICATIONS:

IMPEDANCE: 50 Ohms
 FREQUENCY RANGE: 0-6 GHz
 3RD ORDER IM: ≤ -155 dBc @ 700MHz & 1900MHz
 3RD ORDER IM TEST METHOD: 2x43dBm CARRIERS
 VSWR: $\leq 1.15:1$ THRU 3GHz

NOTE: BOTH CONNECTORS WILL HAVE PROTECTIVE CAPS ON

4	TFT-402-LF	1	PLENUM CABLE	---
3	TUBING	2	HEAT SHRINK	---
2	RSA-3510-SR2LP	1	SMA RIGHT ANGLE MALE	WHITE BRONZE
1	RFN-1009-SR2LP	1	N MALE RIGHT ANGLE	WHITE BRONZE
#	PART NUMBER	QTY	DESCRIPTION	FINISH

CUSTOMER
OUTLINE DRAWING
ALL DIMENSIONS
ARE REFERENCE ONLY
UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN INCHES
AND [MILLIMETERS]

DRAWN
C. ZUNIGA 09/30/16
CHECKED
ORJ DRAWN
C. ZUNIGA 09/30/16

PROPRIETARY AND CONFIDENTIAL

THIS DRAWING CONTAINS
INFORMATION PROPRIETARY TO
RF INDUSTRIES. ANY
UNAUTHORIZED USE OF THIS
DRAWING IS EXPRESSLY
PROHIBITED WITHOUT WRITTEN
PERMISSION FROM RF
INDUSTRIES. ANY VIOLATION IS
PUNISHABLE UNDER U.S.
COPYRIGHT LAWS.

RFconnectors
DIVISION OF RF INDUSTRIES, LTD. 7610 MIRAMAR RD.
SAN DIEGO, CA 92126
(858) 549-6340
(858) 549-6345 FAX

**N MALE RIGHT ANGLE TO
SMA MALE RIGHT ANGLE**

SIZE	CABLE GROUP	DWG NO.	REV
A	-	P2RFC-2279-XX	-
SCALE:	ENGINEERING ID:	SHEET 1 OF 1	
NTS	000000		