

PAI	P2RFC-2309-XX			
RE	DESCRIPTION	DWN	DATE	APPROVED
	ENGINEERING RELEASE	CZS	10/20/16	JDMc

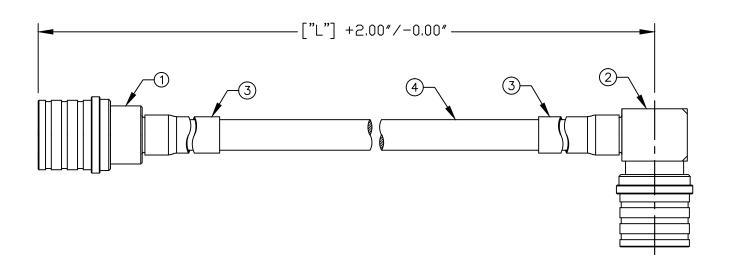



SPECIFICATIONS:

IMPEDANCE: 50 Ohms

FREQUENCY RANGE: 0-6 GHz

3RD ORDER IM: ≤-155 dBc @ 700MHz & 1900MHz 3RD ORDER IM TEST METHOD: 2x43dBm CARRIERS

VSWR: ≤1.15:1 THRU 3GHz

NOTE: BOTH CONNECTORS WILL HAVE PROTECTIVE CAPS ON

L						
I	4	TFT-402-LF	1	PLENUM CABLE		Di
I	3	TUBING	2	HEAT SHRINK		G
I	2	RQA-5010-SR2LP	1	QMA MALE R/A CONNECTOR	WHITE BRONZE	ľ
I	1	RQA-5000-SR2LP	1	QMA MALE CONNECTOR	WHITE BRONZE	Ь
I	#	PART NUMBER	QTY	DESCRIPTION	FINISH	C
-						

CUSTOMER OUTLINE DRAWING

ALL DIMENSIONS ARE REFERENCE ONLY

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES AND [MILLIMETERS]

_			
DRAWN C. ZUNIGA	10/20/16		
CHECKED			
ORJ DRAWN C. ZUNIGA	10/20/16		

PROPRIETARY AND CONFIDENTIAL

THIS DRAWING CONTAINS
INFORMATION PROPRIETARY TO
RF INDUSTRIES, ANY
UNAUTHORIZED USE OF THIS
DRAWING IS EXPRESSLY
PROHIBITED WITHOUT WRITTEN PERMISSION FROM RF
INDUSTRIES, ANY VIOLATION IS PUNISHABLE UNDER U.S. COPYRIGHT LAWS.



7610 MIRAMAR RD.

QMA MALE TO QMA MALE RIGHT ANGLE

13	SIZE	CABLE	GROUP	P2RFC-2309-XX	REV	
	SCALE: ENGINEER		ENGINEE	RING ID: 000000 SHEET 1	OF	1