

PART NO.

P2RFC-2323-XX

REV

DESCRIPTION

DWN

DATE

APPROVED

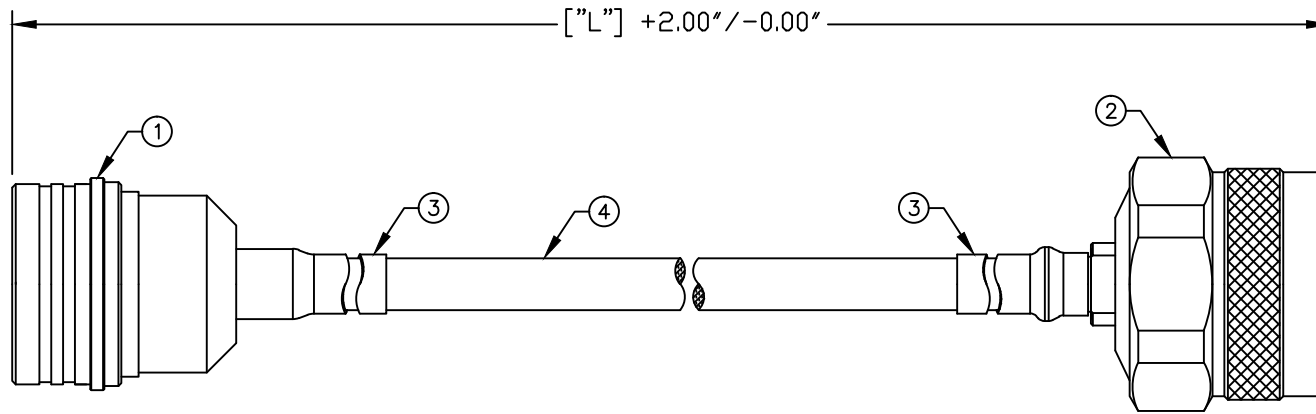
-

ENGINEERING RELEASE

CZS

10/24/16

JDMc

P2RFC-2323-XX

["L"] LENGTH IN INCHES

CONFIGURATION ID

CABLE ASSEMBLY DESIGNATOR

SPECIFICATIONS:

IMPEDANCE: 50 Ohms

FREQUENCY RANGE: 0-6 GHz

3RD ORDER IM: ≤ -155 dBc @ 700MHz & 1900MHz

3RD ORDER IM TEST METHOD: 2x43dBm CARRIERS

VSWR: $\leq 1.2:1$ THRU 3GHz

NOTE: BOTH CONNECTORS WILL HAVE PROTECTIVE CAPS ON

4	TFT-402-LF	1	PLENUM CABLE	---
3	TUBING	2	HEAT SHRINK	---
2	RFN-1002-SR2FL	1	N MALE CONNECTOR	WHITE BRONZE
1	RQN-1300-SR2	1	QN MALE CONNECTOR	WHITE BRONZE
#	PART NUMBER	QTY	DESCRIPTION	FINISH

CUSTOMER
OUTLINE DRAWINGALL DIMENSIONS
ARE REFERENCE ONLYUNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN INCHES
AND [MILLIMETERS]

DRAWN

C. ZUNIGA

10/24/16

CHECKED

ORJ DRAWN

C. ZUNIGA

10/24/16

PROPRIETARY AND CONFIDENTIAL

THIS DRAWING CONTAINS
INFORMATION PROPRIETARY TO
RF INDUSTRIES. ANY
UNAUTHORIZED USE OF THIS
DRAWING IS EXPRESSLY
PROHIBITED WITHOUT WRITTEN
PERMISSION FROM RF
INDUSTRIES. ANY VIOLATION IS
PUNISHABLE UNDER U.S.
COPYRIGHT LAWS.

RFconnectors
DIVISION OF RF INDUSTRIES, LTD.

 7610 MIRAMAR RD.
SAN DIEGO, CA 92126
(858) 549-6340
(858) 549-6345 FAX
QN MALE TO N MALE

SIZE	CABLE GROUP	DWG NO.	REV
A	-	P2RFC-2323-XX	---
SCALE:	ENGINEERING ID:	SHEET 1 OF 1	
NTS	000000		