

PART NO.

P2RFC-2360-XX

REV

DESCRIPTION

DWN

DATE

APPROVED

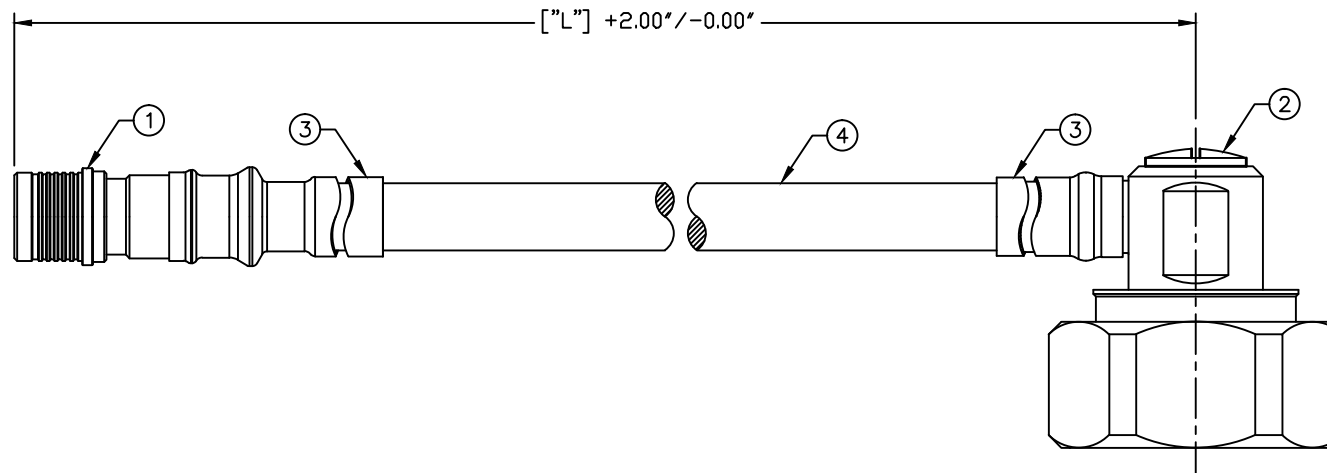
—

ENGINEERING RELEASE

CZS

11/16/16

JDMc

P2RFC-2360-XX

[\"L\"] LENGTH IN INCHES

CONFIGURATION ID

CABLE ASSEMBLY DESIGNATOR

SPECIFICATIONS:

IMPEDANCE: 50 Ohms

FREQUENCY RANGE: 0-6 GHz

3RD ORDER IM: ≤ -155 dBc @ 700MHz & 1900MHz

3RD ORDER IM TEST METHOD: 2x43dBm CARRIERS

VSWR: $\leq 1.15:1$ THRU 3GHz

FOR:SPP-250-LLPL, SPO-250 & FSJ1-50A

NOTE: BOTH CONNECTORS WILL HAVE PROTECTIVE CAPS ON

4	COAX CABLE	1	1/4" SUPER FLEXIBLE	---
3	TUBING	2	HEAT SHRINK	---
2	RFD-1610-HPL	1	7/16 DIN MALE RIGHT ANGLE	WHITE BRONZE
1	RQA-5000-HPL	1	QMA MALE CONNECTOR	WHITE BRONZE
#	PART NUMBER	QTY	DESCRIPTION	FINISH

CUSTOMER
OUTLINE DRAWINGALL DIMENSIONS
ARE REFERENCE ONLYUNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN INCHES
AND [MILLIMETERS]

DRAWN

C. ZUNIGA

11/16/16

CHECKED

ORJ DRAWN

C. ZUNIGA

11/16/16

PROPRIETARY AND CONFIDENTIAL

THIS DRAWING CONTAINS
INFORMATION PROPRIETARY TO
RF INDUSTRIES. ANY
UNAUTHORIZED USE OF THIS
DRAWING IS EXPRESSLY
PROHIBITED WITHOUT WRITTEN
PERMISSION FROM RF
INDUSTRIES. ANY VIOLATION IS
PUNISHABLE UNDER U.S.
COPYRIGHT LAWS.
RFconnectors
 DIVISION OF RF INDUSTRIES, LTD.

 7610 MIRAMAR RD.
 SAN DIEGO, CA 92126
 (858) 549-6340
 (858) 549-6345 FAX

**QMA MALE TO
7/16 DIN MALE RIGHT ANGLE**

SIZE	CABLE GROUP	DWG NO.	REV
A	HPL	P2RFC-2360-XX	—
SCALE:	ENGINEERING ID:	SHEET 1 OF 1	
NTS	000000		