


PART NO.		<b>P2RFC-2378-XX</b>		
REV	DESCRIPTION	DWN	DATE	APPROVED
-	ENGINEERING RELEASE	CZS	11/11/16	JDMc

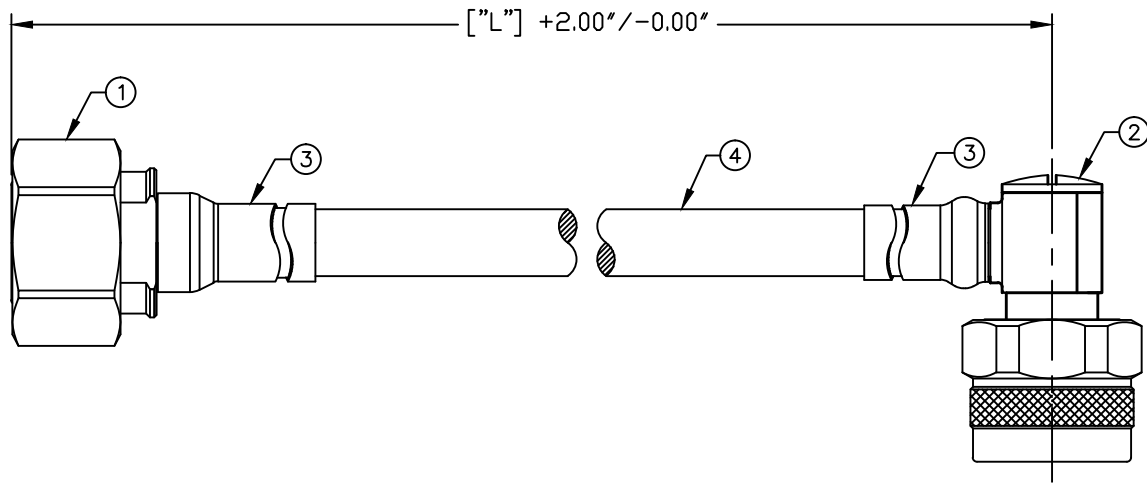

P2RFC-2378-XX  
 [\"L\"] LENGTH IN INCHES  
 CONFIGURATION ID  
 CABLE ASSEMBLY DESIGNATOR

**SPECIFICATIONS:**

IMPEDANCE: 50 Ohms  
 FREQUENCY RANGE: 0-6 GHz  
 3RD ORDER IM:  $\leq -155$  dBc @ 700MHz & 1900MHz  
 3RD ORDER IM TEST METHOD: 2x43dBm CARRIERS  
 VSWR:  $\leq 1.15:1$  THRU 3GHz  
 FOR:SPP-250-LLPL, SPO-250 & FSJ1-50A

NOTE: BOTH CONNECTORS WILL HAVE PROTECTIVE CAPS ON

CUSTOMER OUTLINE DRAWING  
 ALL DIMENSIONS ARE REFERENCE ONLY  
 UNLESS OTHERWISE SPECIFIED:  
 DIMENSIONS ARE IN INCHES AND [MILLIMETERS]

PROPRIETARY AND CONFIDENTIAL  
 THIS DRAWING CONTAINS INFORMATION PROPRIETARY TO RF INDUSTRIES. ANY UNAUTHORIZED USE OF THIS DRAWING IS EXPRESSLY PROHIBITED WITHOUT WRITTEN PERMISSION FROM RF INDUSTRIES. ANY VIOLATION IS PUNISHABLE UNDER U.S. COPYRIGHT LAWS.

**RFconnectors** 7610 MIRAMAR RD. SAN DIEGO, CA 92126 (858) 549-6340  
 DIVISION OF RF INDUSTRIES, LTD. (858) 549-6345 FAX

**4.3/10 MALE TO N MALE R/A**  
 CABLE ASSEMBLY

DRAWN	C. ZUNIGA	11/11/16
CHECKED		
ORJ DRAWN	C. ZUNIGA	11/11/16

SIZE	CABLE GROUP	DWG NO.	REV
A	HPL	<b>P2RFC-2378-XX</b>	-
SCALE:	ENGINEERING ID:	SHEET 1 OF 1	
NTS	000000		

#	PART NUMBER	QTY	DESCRIPTION	FINISH
4	COAX CABLE	1	1/4" SUPER FLEXIBLE	---
3	TUBING	2	HEAT SHRINK	---
2	RFN-1009-HPL	1	N MALE RIGHT ANGLE	WHITE BRONZE
1	RFD-43MS-HPL	1	4.3/10 MALE CONNECTOR	WHITE BRONZE