


PART NO.		P2RFC-2402-XX		
REV	DESCRIPTION	DWN	DATE	APPROVED
-	ENGINEERING RELEASE	CZS	03/28/19	JDMc

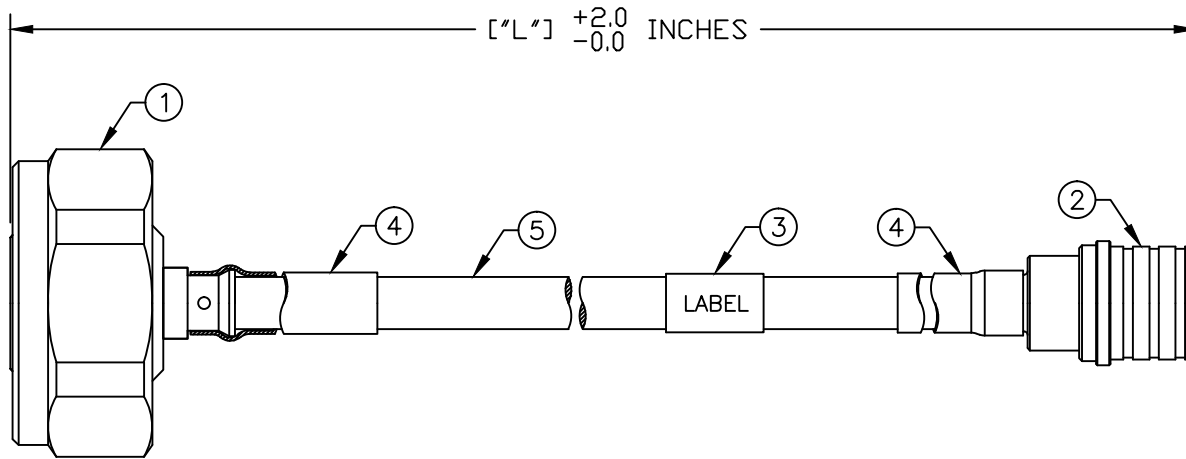

P2RFC-2402-XX
 [\"L\"] LENGTH IN INCHES
 CONFIGURATION ID
 CABLE ASSEMBLY DESIGNATOR

- STANDARD CABLE LENGTHS [\"L\"]:
- 12 [1 FOOT]
 - 24 [2 FEET]
 - 36 [3 FEET]
 - 48 [4 FEET]
 - 60 [5 FEET]
 - 72 [6 FEET]

FOR CUSTOM LENGTHS REPLACE XX FOR NUMBER OF INCHES

SPECIFICATIONS:

IMPEDANCE: 50 Ohms
 FREQUENCY RANGE: 0-6 GHz
 3RD INTERMODULATION: ≤ -155 dBc @ 700MHz & 1900MHz
 3RD INTERMODULATION TEST METHOD: 2x43dBm CARRIERS

NOTE: BOTH CONNECTORS WILL HAVE PROTECTIVE CAPS ON

5	TFT-402-LF	1	COAXIAL (PLENUM) CABLE	----
4	TUBING	2	HEAT SHRINK	----
3	THT-64-427-3	1	CUSTOM LABEL	----
2	RQA-5000-SR2LP	1	QMA PLUG CONNECTOR	WHITE BRONZE
1	RFD-43MS-SR2	1	4.3/10 MALE CONNECTOR	WHITE BRONZE
#	PART NUMBER	QTY	DESCRIPTION	FINISH

CUSTOMER OUTLINE DRAWING	
ALL DIMENSIONS ARE REFERENCE ONLY	
UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES AND [MILLIMETERS]	
DRAWN C. ZUNIGA	03/28/19
CHECKED	
ORJ DRAWN C. ZUNIGA	03/28/19

PROPRIETARY AND CONFIDENTIAL

THIS DRAWING CONTAINS INFORMATION PROPRIETARY TO RF INDUSTRIES, ANY UNAUTHORIZED USE OF THIS DRAWING IS EXPRESSLY PROHIBITED WITHOUT WRITTEN PERMISSION FROM RF INDUSTRIES. ANY VIOLATION IS PUNISHABLE UNDER U.S. COPYRIGHT LAWS.

RF

connectors

7610 MIRAMAR RD.
 SAN DIEGO, CA 92126
 (858) 549-6340

DIVISION OF RF INDUSTRIES, LTD. (858) 549-6345 FAX

4.3/10 MALE TO QMA MALE

.141 SEMI FLEX CABLE ASSEMBLY

SIZE A	CABLE GROUP -	DWG NO. P2RFC-2402-XX	REV -
SCALE: NTS	ENGINEERING ID: 000000	SHEET 1 OF 1	