


PART NO.		P2RFC-2422-XX		
REV	DESCRIPTION	DWN	DATE	APPROVED
-	ENGINEERING RELEASE	CZS	04/04/19	JDMc

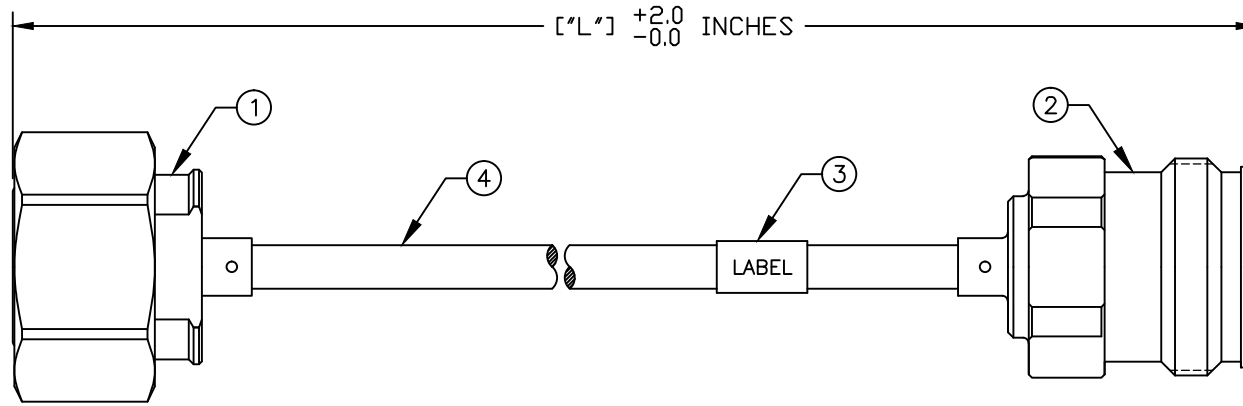

- STANDARD CABLE LENGTHS [\"L\"]:
- 12 [1 FOOT]
 - 24 [2 FEET]
 - 36 [3 FEET]
 - 48 [4 FEET]
 - 60 [5 FEET]
 - 72 [6 FEET]

P2RFC-2422-XX
 [\"L\"] LENGTH IN INCHES
 CONFIGURATION ID
 CABLE ASSEMBLY DESIGNATOR

FOR CUSTOM LENGTHS REPLACE XX FOR NUMBER OF INCHES

SPECIFICATIONS:

IMPEDANCE: 50 Ohms
 FREQUENCY RANGE: 0-6 GHz
 3RD ORDER IM: ≤-160 dBc @ 700MHz & 1900MHz
 3RD ORDER IM TEST METHOD: 2x43dBm CARRIERS
 VSWR: ≤1.15:1 THRU 3GHz

NOTE: BOTH CONNECTORS WILL HAVE PROTECTIVE CAPS ON

CUSTOMER OUTLINE DRAWING
 ALL DIMENSIONS ARE REFERENCE ONLY
 UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES AND [MILLIMETERS]

PROPRIETARY AND CONFIDENTIAL
 THIS DRAWING CONTAINS INFORMATION PROPRIETARY TO RF INDUSTRIES. ANY UNAUTHORIZED USE OF THIS DRAWING IS EXPRESSLY PROHIBITED WITHOUT WRITTEN PERMISSION FROM RF INDUSTRIES. ANY VIOLATION IS PUNISHABLE UNDER U.S. COPYRIGHT LAWS.

RFconnectors
 DIVISION OF RF INDUSTRIES, LTD. 7610 MIRAMAR RD. SAN DIEGO, CA 92126 (858) 549-6340 (858) 549-6345 FAX

4.3/10 MALE TO 4.3/10 DIN FEMALE
 TFT-402 CABLE ASSEMBLY

4	TFT-402-LF	1	.141 PLENUM CABLE	----
3	THT-64-427-3	1	LABEL	----
2	RFD-43F-SR2	1	4.3/10 FEMALE CONNECTOR	WHITE BRONZE
1	RFD-43MS-SR2	1	4.3/10 MALE CONNECTOR	WHITE BRONZE
#	PART NUMBER	QTY	DESCRIPTION	FINISH

DRAWN	C. ZUNIGA	04/04/19
CHECKED		
ORJ DRAWN	C. ZUNIGA	04/04/19

SIZE	CABLE GROUP	DWG NO.	REV
A	SR2	P2RFC-2422-XX	—
SCALE:	ENGINEERING ID:	SHEET 1 OF 1	
NTS	000000		