
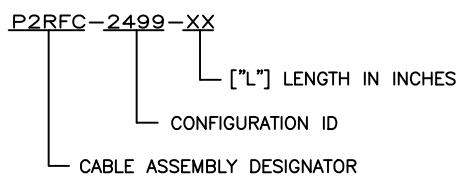


PART NO.		P2RFC-2499-XX		
REV	DESCRIPTION	DWN	DATE	APPROVED
-	ENGINEERING RELEASE	CZS	10/29/19	JDMc

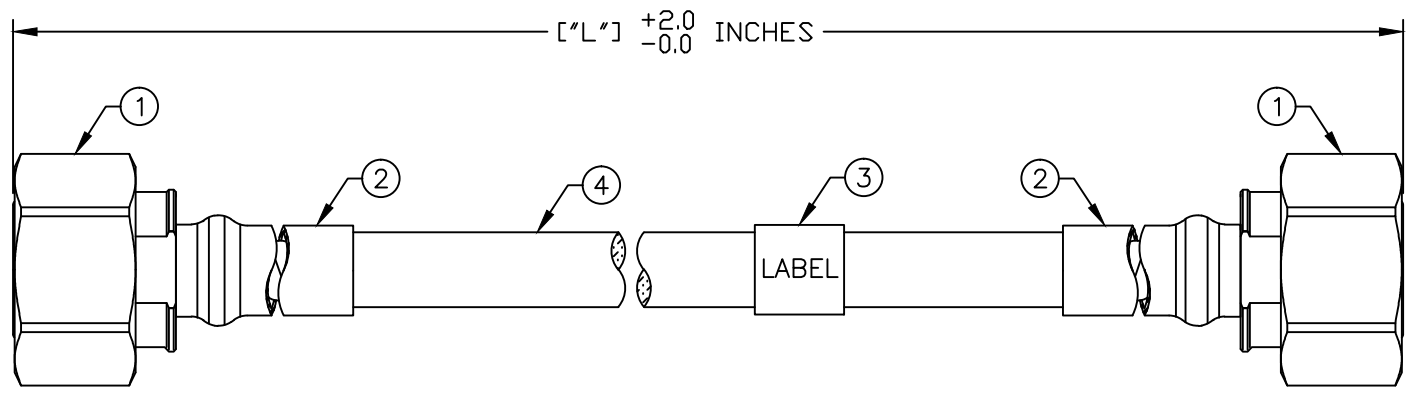

- STANDARD CABLE LENGTHS [\"L\"]:
- 12 [1 FOOT]
 - 24 [2 FEET]
 - 36 [3 FEET]
 - 48 [4 FEET]
 - 60 [5 FEET]
 - 72 [6 FEET]
- FOR CUSTOM LENGTHS REPLACE XX FOR NUMBER OF INCHES

SPECIFICATIONS:

IMPEDANCE: 50 Ohms

NOTE:
BOTH CONNECTORS WILL HAVE PROTECTIVE CAPS ON

CUSTOMER OUTLINE DRAWING
ALL DIMENSIONS ARE REFERENCE ONLY

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN INCHES AND [MILLIMETERS]

RoHS COMPLIANT

PROPRIETARY AND CONFIDENTIAL
THIS DRAWING CONTAINS INFORMATION PROPRIETARY TO RF INDUSTRIES. ANY UNAUTHORIZED USE OF THIS DRAWING IS EXPRESSLY PROHIBITED WITHOUT WRITTEN PERMISSION FROM RF INDUSTRIES. ANY VIOLATION IS PUNISHABLE UNDER U.S. COPYRIGHT LAWS.

RFconnectors
DIVISION OF RF INDUSTRIES, LTD. (858) 549-6345 FAX

4.3/10 MALE TO 4.3/10 MALE
1/4" SUPERFLEX CABLE ASSEMBLY

4	CBL-SCF14-50J	1	1/4" SUPERFLEX FOAM CBL	----
3	LABEL	1	CUSTOM LABEL	----
2	ST-P0375A-K	2	TUBING	HEAT SHRINK
1	RFD-43MS-HPL	2	COAX CONNECTOR	WHITE BRONZE
#	PART NUMBER	QTY	DESCRIPTION	FINISH

DRAWN	C. ZUNIGA	10/29/19
CHECKED		
ORJ DRAWN	C. ZUNIGA	10/29/19

SIZE	CABLE GROUP	DWG NO.	REVISION
A	HPL	P2RFC-2499-XX	—
SCALE:	ENGINEERING ID:	SHEET 1 OF 1	
NTS	000000		