

PAR	P2RFC-2962-XX	P2RFC-2962-XX				
REV	DESCRIPTION	DWN	DATE	APPROVED		
_	ENGINEERING RELEASE	czs	09/04/18	JDMc		

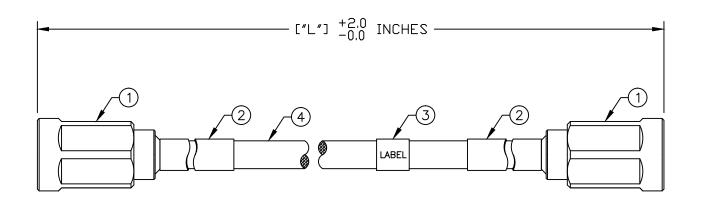



## SPECIFICATIONS:

IMPEDANCE: 50 Ohms

FREQUENCY RANGE: 0-4 GHz

3RD INTERMODULATION: ≤-160 dBc @ 700MHz & 1900MHz 3RD INTERMODULATION TEST METHOD: 2x43dBm CARRIERS

4	CBL-TFT-402LF	1	COAXIAL (PLENUM) CABLE			
3	THT-64-427-3	1	CUSTOM LABEL			
2	ST-P0250A-K	2	TUBING	HEAT SHRINK		
1	R180052007		NEXT10 MALE CONNECTOR	WHITE BRONZE		
#	PART NUMBER	QTY	DESCRIPTION	FINISH		

CUSTOMER OUTLINE DRAWING

ALL DIMENSIONS ARE REFERENCE ONLY

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES AND [MILLIMETERS]

rate [miceimerento]					
DRAWN C. ZUNIGA	09/04/18	ι			
CHECKED	00/01/10	PF			
		IN			
ORJ DRAWN C. ZUNIGA	09/04/18				

## PROPRIETARY AND CONFIDENTIAL

THIS DRAWING CONTAINS
INFORMATION PROPRIETARY TO
RF INDUSTRIES, ANY
UNAUTHORIZED USE OF THIS
DRAWING IS EXPRESSLY
PROHIBITED WITHOUT WRITTEN PERMISSION FROM RF
NDUSTRIES. ANY VIOLATION
PUNISHABLE UNDER U.S.
COPYRIGHT LAWS.



7610 MIRAMAR RD. SAN DIEGO, CA 92126

## **NEXT10 MALE TO NEXT10 MALE**

CABLE ASSEMBLY

S EN IS	SIZE	CABLE	GROUP	DWG NO. <b>P2RFC-2962-XX</b>				REV		
.3	SCALE	: NTS	ENGINEE	RING ID:	000000	SHEET	1	OF	1	