


THIS DRAWING CONTAINS INFORMATION PROPRIETARY TO RF INDUSTRIES.
 ANY UNAUTHORIZED USE OF THIS DRAWING IS EXPRESSLY PROHIBITED.
 WITHOUT WRITTEN PERMISSION FROM RF INDUSTRIES.
 ANY VIOLATION IS PUNISHABLE UNDER U.S. COPYRIGHT LAWS.

ALL DIMENSIONS ARE REFERENCE ONLY

PART NO. **RFW-10859-X**

REV	DESCRIPTION	DWN	DATE	APPROVED
-	ENGINEERING RELEASE	CZS	2/04/05	JDMc

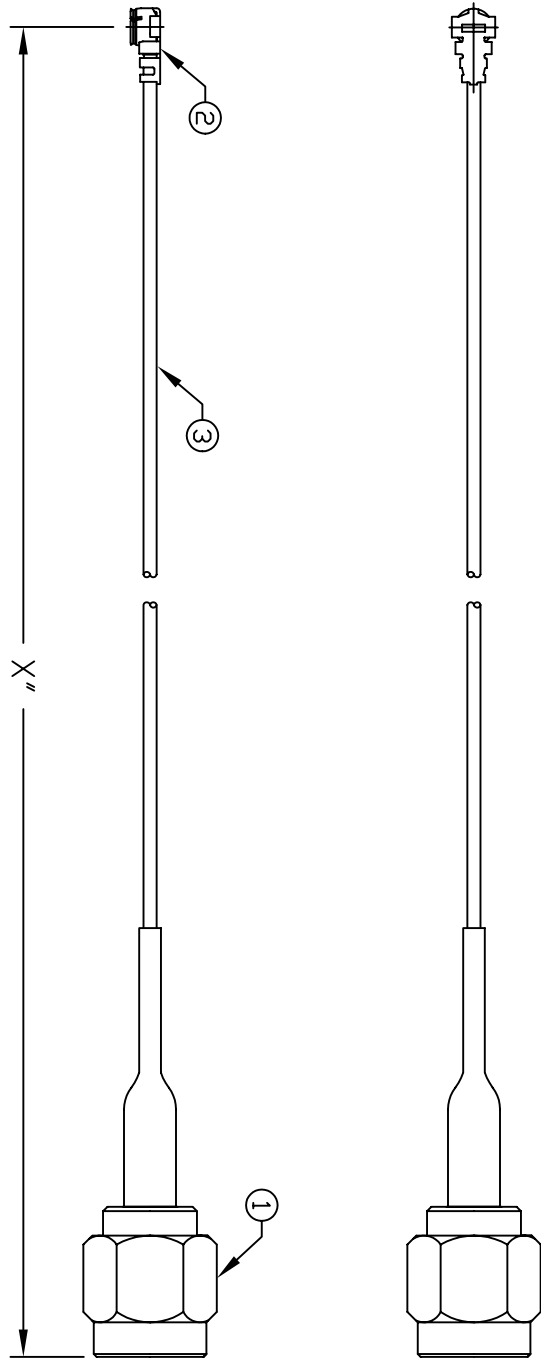


SPECIFICATIONS:

IMPEDANCE: 50 Ohms
 CABLE STYLE: 200' 30V COAXIAL
 ITEM: 32 AWG
 JACKET:
 AVERAGE THICKNESS: .13mm
 DIAMETER: 1.13mm ± .03
 MATERIAL: FEP
 NOMINAL CAPACITANCE: 96 pF/m
 NOMINAL VEL. OF PROP: 96%
 ATTENUATION (dB/100m): 1800MHz (300) 2400MHz (480) - 5200MHz (720)
 RATING TEMP VOLTAGE: 200' 30V
 CONDUCTOR RESISTANCE: 545 Ohm°C MAX.
 INSULATION RESISTANCE: 100 Mohm/KM MIN.
 DIELECTRIC STRENGTH: AC 1.0KV
 SPARK TEST: 0.5 KV

X = Length in inches

#	PART NUMBER	QTY	DESCRIPTION	FINISH
3	CABLE	1	1.13	GRAY
2	CONNECTOR	1	U.F.L TYPE (MHF)	---
1	CONNECTOR	1	RP SMA PLUG	---

000000	DRAWN JDMc	2/04/05
	CHECKED JDMc	
	ORU DRAWN C. ZUNIGA	2/04/05
	APPROVALS	DATE



RF Connectors
 DIVISION OF RF INDUSTRIES, LTD.

7610 MIRAMAR RD
 SAN DIEGO, CA 92126
 (858) 549-6340
 (858) 549-6345 FAX

CABLE ASSEMBLY

R/A MHF PLUG TO RP SMA PLUG

SIZE	CABLE GROUP	DWG NO.	REV
A	1.13	RFW-10859-X	-

SCALE: NTS CAD FILE OUTLINE SHEET 1 OF 1