
THIS DRAWING CONTAINS INFORMATION PROPRIETARY TO RF INDUSTRIES, ANY UNAUTHORIZED USE OF THIS DRAWING IS EXPRESSLY PROHIBITED WITHOUT WRITTEN PERMISSION FROM RF INDUSTRIES.

ANY VIOLATION IS PUNISHABLE UNDER U.S. COPYRIGHT LAWS.

ALL DIMENSIONS ARE REFERENCE ONLY



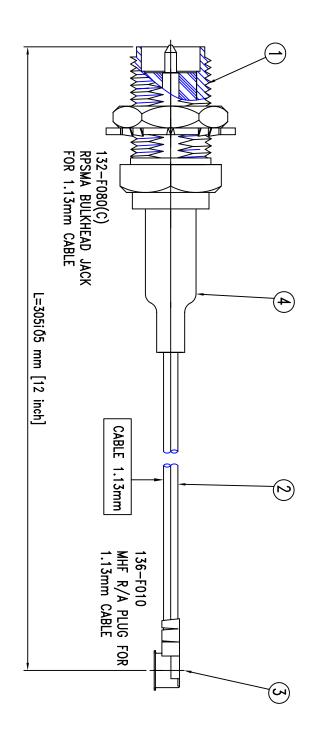

## SPECIFICATIONS:

1.IMPEDANCE : 50 OHMS

2.RFI P/N:RFW-11288-12

SCALE: NTS COUTLINE SHEET 1 OF 1	.xx±.003 [.08]	APPROVALS DATE X	APPR	FINISH	am MATRL	# DESCRIPTION OTY MATRL
CAD FILE	.xxx±.001 [.03]	[8] xxx±.003 [.08]	JDMc			4
	DECIMALS		ORJ DRAWN			W
CABLE GROOT	NCES A		C			2
CABLE CBOLLD DWC NO	E NOTED -	3/21/04	JUNIC			_
U.FL TO RP SMA BULKHEAD JACK	AND [MILLIMETERS]	0 /21 /04	DRAWN			0
	DIMENSIONS ARE IN INCHES					9
						ω.
	6. ALL DIMENSIONS ARE AFTER PLATING.	ტ.				7
	CONCENTRIC WITHIN DOO TIR	ç				5
/ LL_DIVISION OF RF INDUSTRIES, LTD. (858) 549-6545 FAX	4. SURFACE ROUGHNESS 63 FINISH MIL—STD—10	4.1				Oi.
	3. CHAMFER 1ST & LAST THREADS 45° /	3.				HEAT SHRINK
SAN DIEGO,CA 92126	2. BREAK ALL CORNERS & EDGES .005 R. MAX. /	2. :				3 IPX CONNECTOR
/ STO MIRAMAR RU	1 REMOVE ALL BURRS	·				2 1.13 mm CABLE
	UNLESS OTHERWISE SPECIFIED:		XXXXXXX			1 RP SMA JACK