


PART NO.		RFW-12602-XX	
REV/	DESCRIPTION	DWN/	DATE
-	ENGINEERING RELEASE	CZS	3/11/20
		JDMc	APPROVED

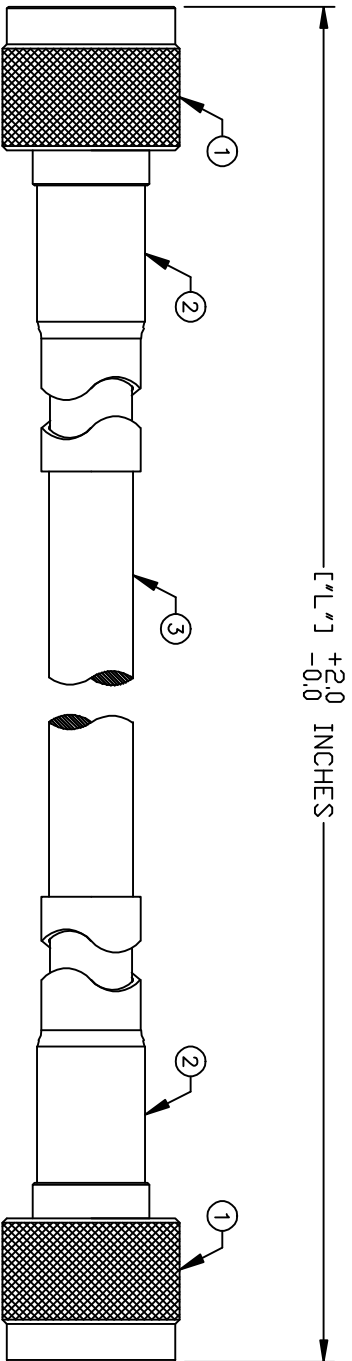

SPECIFICATIONS:

IMPEDANCE: 50 Ohms
 VELOCITY of PROPAGATION: 82%
 CAPACITANCE: 23.8 PF/FT
 ATTENUATION 5800 MHz: 35.5 DB/100M
 INNER CONDUCTOR: BCCAL
 DIELECTRIC: FOAM PE
 SHIELDING: ALUMINUM TAPE (BONDED)
 OUTER CONDUCTOR: TC WIRE BRAID
 JACKET: PE (OUTER DIAMETER 0.405")
 ROHS COMPLIANT

#	PART NUMBER	QTY	DESCRIPTION	FINISH
3	CBL-CU400	1	COAXIAL CABLE	BLACK
2	ST-3P500A-K	2	HEAT SHRINK	BLACK
1	RFN-1006-3I	2	N MALE CONNECTOR	SILVER

RFW-12602-XX
 [\"L\"] LENGTH IN INCHES
 CONFIGURATION ID
 CABLE ASSEMBLY DESIGNATOR

STANDARD CABLE LENGTHS [\"L\"]:
 -12 [1 FOOT]
 -24 [2 FEET]
 -36 [3 FEET]
 -48 [4 FEET]
 -60 [5 FEET]
 -72 [6 FEET]

FOR CUSTOM LENGTHS REPLACE XX
 FOR NUMBER OF INCHES

CUSTOMER
 OUTLINE DRAWING
 ALL DIMENSIONS
 ARE REFERENCE ONLY
 UNLESS OTHERWISE SPECIFIED
 DIMENSIONS ARE IN INCHES
 AND [MILLIMETERS]

PROPRIETARY AND CONFIDENTIAL
 THIS DRAWING CONTAINS
 INFORMATION PROPRIETARY
 TO RF INDUSTRIES. ANY
 UNAUTHORIZED USE OF
 THIS DRAWING IS
 EXPRESSLY PROHIBITED
 WITHOUT WRITTEN
 PERMISSION FROM RF
 INDUSTRIES. ANY
 VIOLATION IS PUNISHABLE
 UNDER U.S. COPYRIGHT
 LAWS.

RF
Communications
 DIVISION OF RF INDUSTRIES, LTD. (858) 549-6345 FAX
 7610 MIRAMAR RD.
 SAN DIEGO, CA 92126
 (858) 549-6340

N MALE TO N MALE
 CU400 CABLE ASSEMBLY

SIZE: CABLE GROUP: A N/A DWG. NO. RFW-12602-XX REVISION: —
 SCALE: NTS ENGINEERING ID: 000000 SHEET 1 OF 1

DRAWN	D. McREYNOLDS	3/11/20
CHECKED		
ORL DRAWN	C. ZUNIGA	08/27/19