


PART NO.

RFW-5030-XX

REV	DESCRIPTION	DWN	DATE	APPROVED
-	ENGINEERING RELEASE	CZS	04/24/18	JDMc

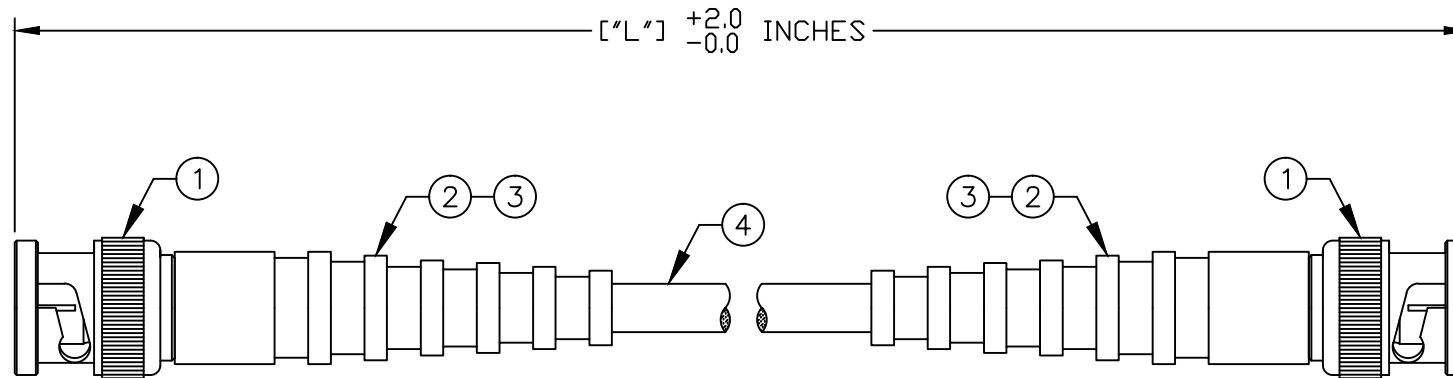

RFW-5030-XX

[\"L\"] LENGTH IN INCHES
CONFIGURATION ID
CABLE ASSEMBLY DESIGNATOR

STANDARD CABLE LENGTHS [\"L\"]:

-12 [1 FOOT]
-24 [2 FEET]
-36 [3 FEET]
-48 [4 FEET]
-60 [5 FEET]
-72 [6 FEET]

FOR CUSTOM LENGTHS REPLACE XX
FOR NUMBER OF INCHES

SPECIFICATIONS:

IMPEDANCE: 50 Ohms
FREQUENCY RANGE: 0-4 GHz
TEMPERATURE RANGE: -65°C TO 85°C

4	CBL-58AU-LF	1	COAXIAL CABLE	ROHS COMPLIANT
3	PT-4015-03-BK	2	STRAIN RELIEF	---
2	ST-P0250A-K	2	TUBING	HEAT SHRINK
1	RFB-1106-2T	2	BNC PLUG CONNECTOR	NICKEL
#	PART NUMBER	QTY	DESCRIPTION	FINISH

CUSTOMER
OUTLINE DRAWINGALL DIMENSIONS
ARE REFERENCE ONLYUNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN INCHES
AND [MILLIMETERS]

DRAWN	C. ZUNIGA	04/24/18
CHECKED		
ORJ DRAWN	C. ZUNIGA	04/24/18

PROPRIETARY AND CONFIDENTIAL

THIS DRAWING CONTAINS
INFORMATION PROPRIETARY
TO RF INDUSTRIES. ANY
UNAUTHORIZED USE OF
THIS DRAWING IS
EXPRESSLY PROHIBITED
WITHOUT WRITTEN
PERMISSION FROM RF
INDUSTRIES. ANY
VIOLATION IS PUNISHABLE
UNDER U.S. COPYRIGHT
LAWS.

RFconnectors
DIVISION OF RF INDUSTRIES, LTD.

7610 MIRAMAR RD.
SAN DIEGO, CA 92126
(858) 549-6340
(858) 549-6345 FAX

**BNC PLUG TO BNC PLUG
CABLE ASSEMBLY**

SIZE	CABLE GROUP	DWG NO.	REV
A	C	RFW-5030-XX	—
SCALE:	ENGINEERING ID:		
NTS	000000		
SHEET 1 OF 1			