


NOTES: UNLESS OTHERWISE SPECIFIED

1. MATERIALS AND COMPONENTS ARE RoHS/REACH COMPLIANT.
2. CONNECTORS MEET THE REQUIREMENTS OF ANSI/TIA 568-C.3
3. 100% TESTED FOR OPTICAL PERFORMANCE, END FACE CRITERIA AND CLEANLINESS.
4. CABLE ASSEMBLIES ARE MANUFACTURED TO C ENTERPRISES STANDARDS.
5. STANDARDS AND SPECIFICATIONS AVAILABLE UPON REQUEST.
6. NOT ALL FIBERS ARE SHOWN DO TO SPACE CONSTRAINT.
7. STAGGERED END WITH PULLING EYE
 - 7.1. CONNECTOR PAIRS STAGGERED BY 1 INCH INCREMENTS.
 - 7.2. PAIRS STAGGER ALTERNATE BY INCREASING AND DECREASING FROM DEFINED BREAKOUT LENGTH.
 - 7.3. PAIRS 1-2 LONGEST: 30". PAIRS 23-24 SHORTEST: 19".

- △8 FIBER LEG LABEL.
- △9 HEAT SHRINK FOR STRAIN RELIEF.
- △10 HEAT SHRINK
- △11 C-BREAK: OVERALL DIAMETER 20 mm MAX.
- △12 SPIRAL WRAP FOR STRAIN RELIEF
- △13 HEAT SHRINK FOR CABLE PROTECTION

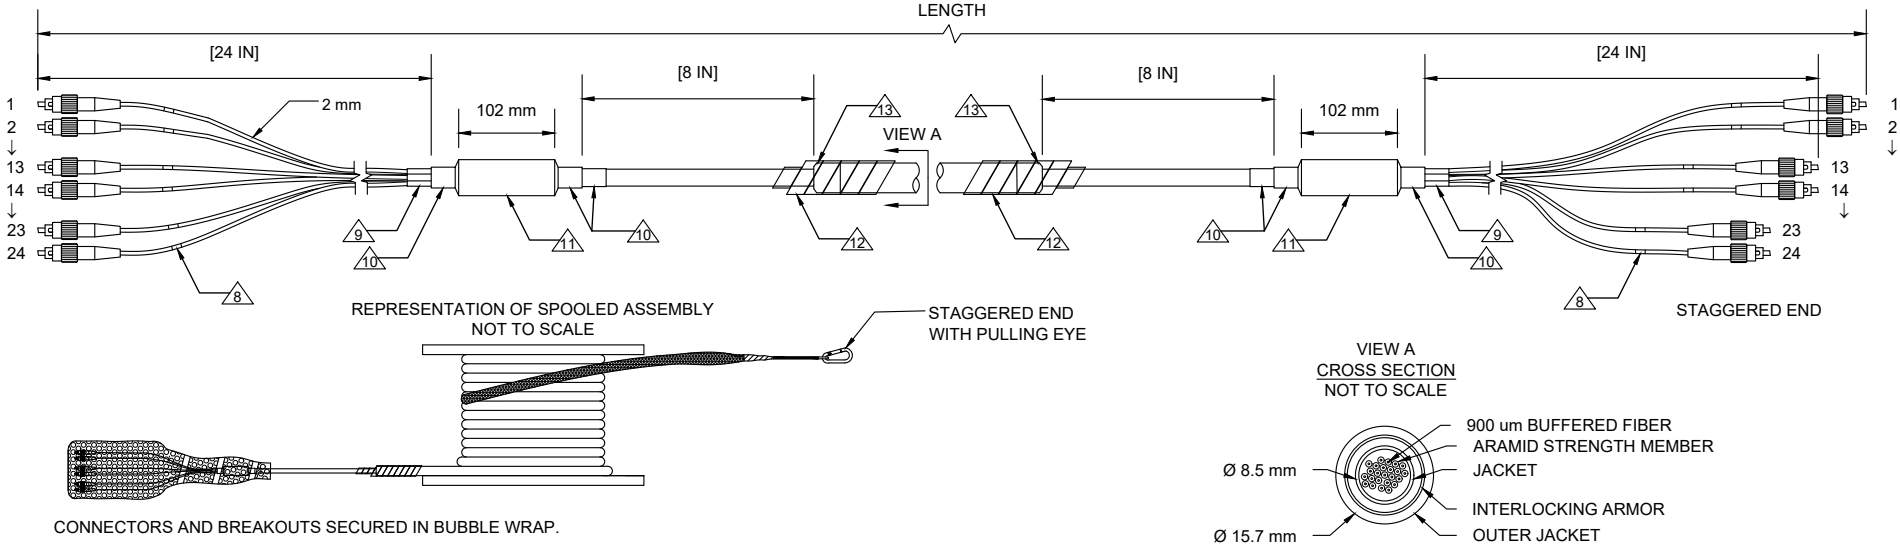

REV	ECR	DESCRIPTION	BY	DATE	CHECKED
A	-	INITIAL RELEASE	K.T.	03/06/2017	A.J.

BILL OF MATERIALS		
ITEM	QTY	COMPONENT
6	1	SPOOL
5	1	SINGLEMODE APC TEST REPORT
4	1	PULLING EYE: 24 FIBERS, CONNECTORS STAGGERED
3	2	SINGLE LEG BREAKOUT: 2.0 mm FURCATION TUBES, YELLOW
2	AR	SINGLEMODE OS2 24 FIBER OFCP ARMORED CABLE; YELLOW: PERFORMA
1	48	FC APC POLISH SM CONNECTOR; METAL HOUSING, GREEN BOOT: PERFORMA

APC TEST LIMITS AT 1310 nm			
MAX. I.L.	TYP. I.L.	MIN. R.L.	TYP. R.L.
≤0.50dB	0.20dB	≥65dB	68dB

DESCRIPTION: FC APC POLISH / FC APC POLISH, 24 FIBER SINGLEMODE ARMORED OFCP CABLE, 2.0 mm SINGLE LEG BREAKOUTS, PULLING EYE W/ STAGGERED CONNECTORS, TEST REPORT

DRAWN BY:	K. THOMAS	03/06/2017
APVD BY:	A. JENSEN	03/06/2017

C ENTERPRISES
2445 CADES WAY
VISTA CA 92081
760-599-5111

DIMENSIONS: METRIC [IMPERIAL]

PROPRIETARY AND CONFIDENTIAL

THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION OF C ENTERPRISES. NOT TO BE USED, COPIED, OR DISCLOSED WITHOUT WRITTEN PERMISSION. ALL RIGHTS RESERVED.

TITLE: 24 FIBER FC/FC SM ARMORED, PULLING EYE	
SIZE	DWG. NO.
A	SAPA24FCFCFRPPS
SCALE: NOT TO SCALE	SHEET 1 OF 1

REV
A