


NOTES: UNLESS OTHERWISE SPECIFIED

1. MATERIALS AND COMPONENTS ARE RoHS/REACH COMPLIANT.
2. ASSEMBLY MEET THE REQUIREMENTS OF ANSI/TIA 568-C.3.
3. 100% TESTED FOR OPTICAL PERFORMANCE, END FACE CRITERIA AND CLEANLINESS.
4. CABLE ASSEMBLIES ARE MANUFACTURED TO C ENTERPRISES STANDARDS.
5. STANDARDS AND SPECIFICATIONS AVAILABLE UPON REQUEST.
6. INDIVIDUALLY BAGGED.
7. LLU: LENGTH AND UNIT OF MEASURE.
8. DRAWING DEPICTS MULTIMODE 12 FIBER PIGTAIL ASSEMBLY WITH LC CONNECTORS.
9. REFER TO SALES FOR FURTHER DETAILS.

REV	ECR	DESCRIPTION	BY	DATE	CHECKED
A	-	INITIAL RELEASE	K.T.	06/15/2017	A.J.

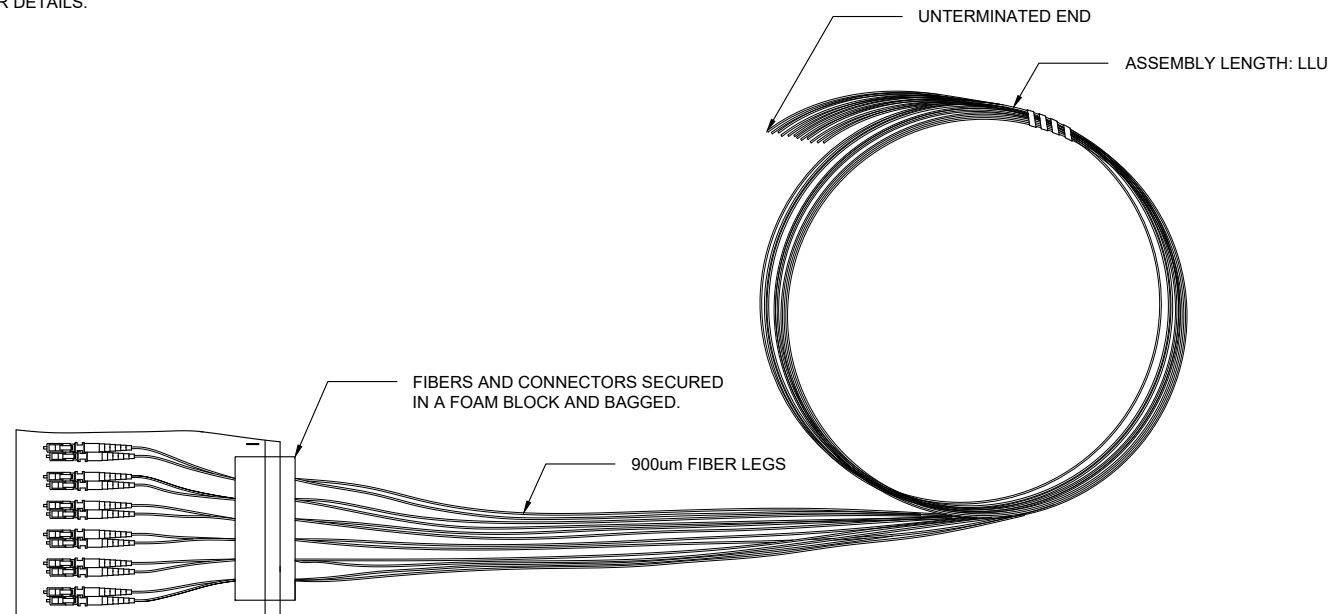

FIBER LEG COLOR	
1	BLUE
2	ORANGE
3	GREEN
4	BROWN
5	GREY
6	WHITE
7	RED
8	BLACK
9	YELLOW
10	PURPLE
11	ROSE
12	AQUA

ASSEMBLY OPTIONS	
CONNECTORS AVAILABLE: LC, SC, FC, ST	
CONNECTOR QUANTITY: 6, 12, 24	
FIBER MODE: SINGLE-MODE, OM1, OM2, OM3, OM4	
ASSEMBLY LENGTH: AS SPECIFIED	
PRODUCT RANGE	
PERFORMA	PERFORMANCE COMPONENTS
ULTRA	CORNING COMPONENTS

SINGLE-MODE UPC TEST LIMITS AT 1310 nm			
MAX. I.L.	TYP. I.L.	MIN. R.L.	TYP. R.L.
≤0.50dB	0.20dB	≥50dB	60dB
SINGLE-MODE APC TEST LIMITS AT 1310 nm			
MAX. I.L.	TYP. I.L.	MIN. R.L.	TYP. R.L.
≤0.50dB	0.20dB	≥65dB	68dB
MULTIMODE TEST LIMITS AT 1300 nm			
MAX. I.L.	TYP. I.L.	MIN. R.L.	TYP. R.L.
≤0.75dB	0.20dB	N/A	N/A

DESCRIPTION: CONNECTORS x6,12, OR 24-FIBER PIGTAIL SET, TIGHT BUFFERED DIST CABLE, 900 um, INDIVIDUAL BAG		
DRAWN BY:	K. THOMAS	06/15/2017
APVD BY:	A. JENSEN	06/15/2017
DIMENSIONS: METRIC [IMPERIAL]		TITLE: 900 um FIBER PIGTAIL KITS
PROPRIETARY AND CONFIDENTIAL THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION OF C ENTERPRISES. NOT TO BE USED, COPIED, OR DISCLOSED WITHOUT WRITTEN PERMISSION. ALL RIGHTS RESERVED.		SIZE: A DWG. NO.: PIGTAIL_KITS SCALE: NOT TO SCALE
		REV: A SHEET 1 OF 1



C ENTERPRISES
2445 CADES WAY
VISTA CA 92081
760-599-5111