
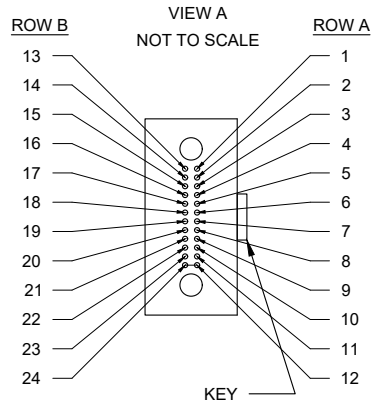



NOTES: UNLESS OTHERWISE SPECIFIED

1. MATERIALS AND COMPONENTS ARE RoHS/REACH COMPLIANT.
2. CONNECTORS MEET THE REQUIREMENTS OF ANSI/TIA 568-C.3
3. 100% TESTED FOR OPTICAL PERFORMANCE, END FACE CRITERIA AND CLEANLINESS.
4. CABLE ASSEMBLIES ARE MANUFACTURED TO C ENTERPRISES STANDARDS.
5. STANDARDS AND SPECIFICATIONS AVAILABLE UPON REQUEST.

REV	ECR	DESCRIPTION	BY	DATE	CHECKED
A	-	INITIAL RELEASE	M. K	11/09/2018	A.J.

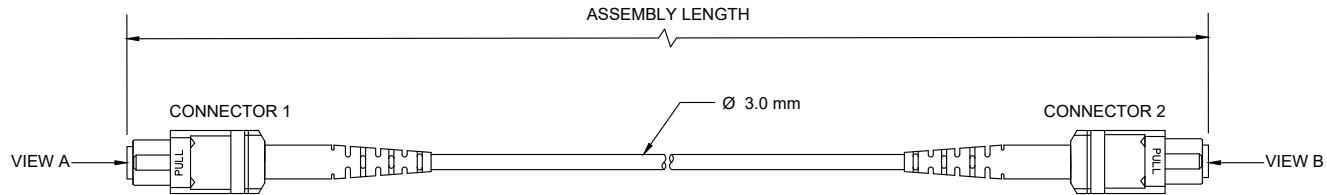


METHOD B		
POSITION	FIBER COLOR	POSITION
CONNECTOR 1		CONNECTOR 2
ROW A		ROW B
1	BLUE	24
2	ORANGE	23
3	GREEN	22
4	BROWN	21
5	SLATE	20
6	WHITE	19
7	RED	18
8	BLACK	17
9	YELLOW	16
10	VIOLET	15
11	ROSE	14
12	AQUA	13
ROW B		ROW A
13	BLUE	12
14	ORANGE	11
15	GREEN	10
16	BROWN	9
17	SLATE	8
18	WHITE	7
19	RED	6
20	BLACK	5
21	YELLOW	4
22	VIOLET	3
23	ROSE	2
24	AQUA	1

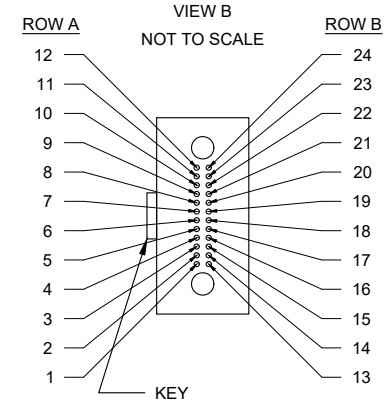

DESCRIPTION: MTP-24 FEMALE PC POLISH/MTP-24 FEMALE PC POLISH x 24-FIBER OM3 OFNP MIC 250 um W/ CP&G FIBER, TEST REPORT, POLARITY TYPE B

DRAWN BY:	M. KHANFIR	11/09/2018
APVD BY:	A. JENSEN	11/09/2018



C ENTERPRISES
2445 CADES WAY
VISTA CA 92081
760-599-5111

BILL OF MATERIALS		
ITEM	QTY	COMPONENT
3	1	MULTIMODE TEST REPORT
2	AR	MULTIMODE OM3 24-FIBER NON SUB-UNITIZED 3.0 mm OFNP CABLE; AQUA: PERFORMA, CORNING GLASS AND PRINT
1	2	MTP-24 FEMALE MULTIMODE PC POLISH; AQUA HOUSING, BLACK BOOT: CORNING

MULTI-MODE TEST LIMITS AT 1300 nm			
MAX. I.L.	TYP. I.L.	MIN. R.L.	TYP. R.L.
≤0.75dB	0.20dB	N/A	N/A

DIMENSIONS: METRIC [IMPERIAL]

PROPRIETARY AND CONFIDENTIAL

THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION OF C ENTERPRISES. NOT TO BE USED, COPIED, OR DISCLOSED WITHOUT WRITTEN PERMISSION. ALL RIGHTS RESERVED.

TITLE: MTP-24 OM3 24-FIBER MIC 250 um		
SIZE	DWG. NO.	REV
A	JPPG24MSMSXRXTX	A
SCALE: NOT TO SCALE		SHEET 1 OF 1