



NOTES: UNLESS OTHERWISE SPECIFIED

1. MATERIALS AND COMPONENTS ARE RoHS/REACH COMPLIANT.
2. CONNECTORS MEET THE REQUIREMENTS OF ANSI/TIA 568-C.3
3. 100% TESTED FOR OPTICAL PERFORMANCE, END FACE CRITERIA AND CLEANLINESS.
4. CABLE ASSEMBLIES ARE MANUFACTURED TO C ENTERPRISES STANDARDS.
5. STANDARDS AND SPECIFICATIONS AVAILABLE UPON REQUEST.
6. CLIPPED A-B / B-A, RECONFIGURABLE.
7. FIBER LEG LABEL. 4 PLACES.
8. HEAT SHRINK FOR BREAKOUT STRAIN RELIEF. 4 PLACES.
9. SINGLE LEG BREAKOUT. OVERALL DIAMETER: 13 mm. 2 PLACES.
10. HEAT SHRINK FOR CABLE PROTECTION. 2 PLACES.
11. SPIRAL WRAP FOR STRAIN RELIEF. 2 PLACES.

REV	ECR	DESCRIPTION	BY	DATE	CHECKED
A	-	INITIAL RELEASE	K.T.	06/30/2020	A.J.

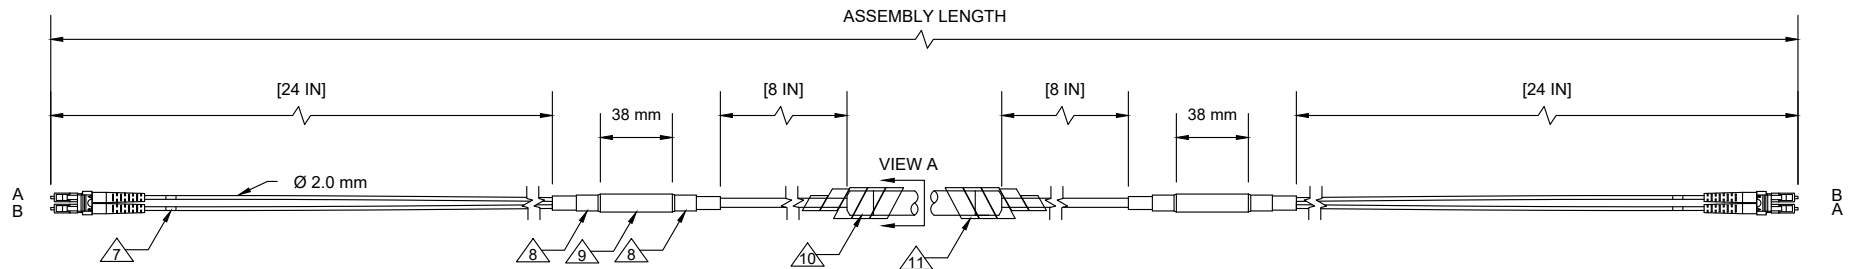


VIEW A
CABLE CROSS SECTION
NOT TO SCALE

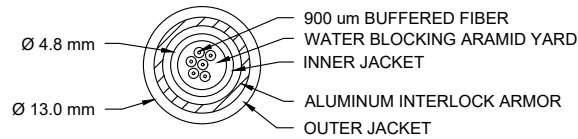

BILL OF MATERIALS		
ITEM	QTY	COMPONENT
4	1	UPC TEST REPORT; 1310 nm
3	2	SINGLE LEG BREAKOUT: 2.0 mm FURCATION TUBES, YELLOW, 24 IN.
2	AR	SINGLE-MODE OS2 6-FIBER OFCP ARMORED CABLE; YELLOW; PERFORMA; CORNING GLASS AND PRINT.
1	2	LC-CLIPPED SINGLE-MODE OS2 UPC POLISH; BLUE HOUSING, BLUE BOOT; PERFORMA.

UPC TEST LIMITS AT 1310 nm			
MAX. I.L.	TYP. I.L.	MIN. R.L.	TYP. R.L.
≤0.50dB	0.20dB	≥50dB	60dB

DRAWN BY: K. THOMAS		06/30/2020	 C-ENTERPRISES <i>Connecting Today's Infrastructures</i>		C ENTERPRISES 2445 CADES WAY VISTA CA 92081 760-599-5111	
APVD BY: A. JENSEN		06/30/2020				
DESCRIPTION: LC-CLIP UPC POLISH / LC-CLIP UPC POLISH x 2-FIBER SINGLE-MODE OS2 OFCP ARMORED CABLE, 24 INCH BREAKOUT, TEST REPORT.			DIMENSIONS: METRIC [IMPERIAL]		TITLE: LC/LC OS2 OFNP x2 FIBER ARMORED	
PROPRIETARY AND CONFIDENTIAL			SIZE: A	DWG. NO.: SUPA02LCLCFRXPX		REV: A
THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION OF C ENTERPRISES. NOT TO BE USED, COPIED, OR DISCLOSED WITHOUT WRITTEN PERMISSION. ALL RIGHTS RESERVED.			SCALE: NOT TO SCALE		SHEET 1 OF 1	