
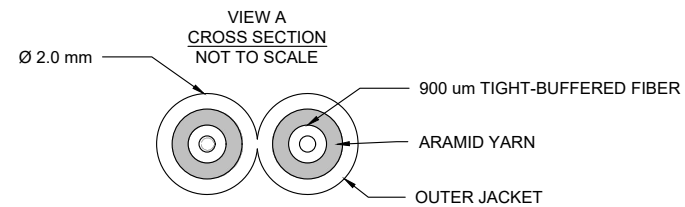


NOTES: UNLESS OTHERWISE SPECIFIED

1. MATERIALS AND COMPONENTS ARE RoHS/REACH COMPLIANT.
2. CONNECTORS MEET THE REQUIREMENTS OF ANSI/TIA 568-C.3.
3. 100% TESTED FOR OPTICAL PERFORMANCE, END FACE CRITERIA AND CLEANLINESS.
4. CLIPPED A-B / B-A.
5. CABLE ASSEMBLIES ARE MANUFACTURED TO C ENTERPRISES STANDARDS.
6. STANDARDS AND SPECIFICATIONS AVAILABLE UPON REQUEST

REV	ECR	DESCRIPTION	BY	DATE	CHECKED
A	-	INITIAL RELEASE	M.K.	12/15/2017	A.J

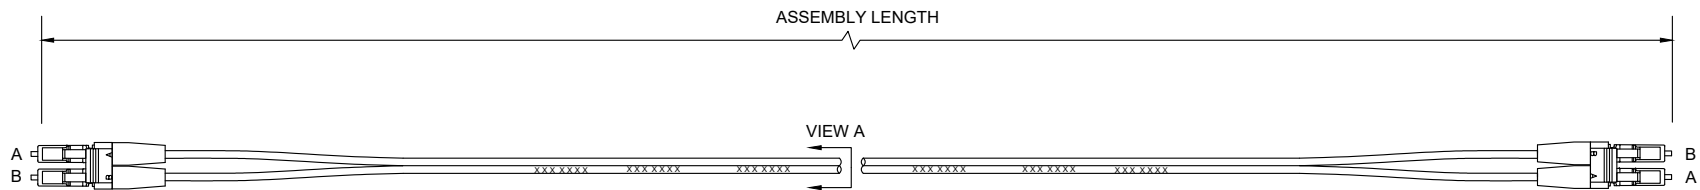

DESCRIPTION: LC-CLIP SHORT BOOT PC / LC-CLIP SHORT BOOT PC, x 2-FIBER OM1 2.0 mm ZIP OFNR CABLE, PERFORMA

DRAWN BY:	M. KHANFIR	12/14/2017
APVD BY:	A.JENSEN	12/15/2017



C-ENTERPRISES
Connecting Today's Infrastructures

C ENTERPRISES
2445 CADES WAY
VISTA CA 92081
760-599-5111

BILL OF MATERIALS			PC TEST LIMITS AT 1300 nm			
ITEM	QTY	COMPONENT	MAX. I.L.	TYP. I.L.	MIN. R.L.	TYP. R.L.
2	2	MULTI-MODE OM1 ZIP OFNR 2.0 mm CABLE, ORANGE: PERFORMA, CORNING GLASS AND PRINT				
1	4	LC-CLIPPED PC POLISH; BEIGE HOUSING, WHITE SHORT BOOT: PERFORMA	≤0.75dB	0.20dB	N/A	N/A

DIMENSIONS: METRIC [IMPERIAL]		TITLE: LC-CLIP SHORT BOOT/LC-CLIP SHORT BOOT OM1 2.0 mm ZIP OFNR	
PROPRIETARY AND CONFIDENTIAL	SIZE: A	DWG. NO.: MPSZ02LELEXXXPX	REV: A
THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION OF C ENTERPRISES. NOT TO BE USED, COPIED, OR DISCLOSED WITHOUT WRITTEN PERMISSION. ALL RIGHTS RESERVED.			SCALE: NOT TO SCALE
			SHEET 1 OF 1