
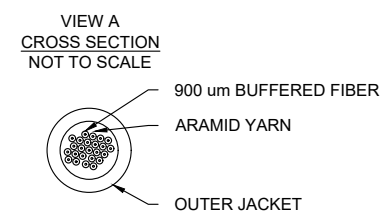
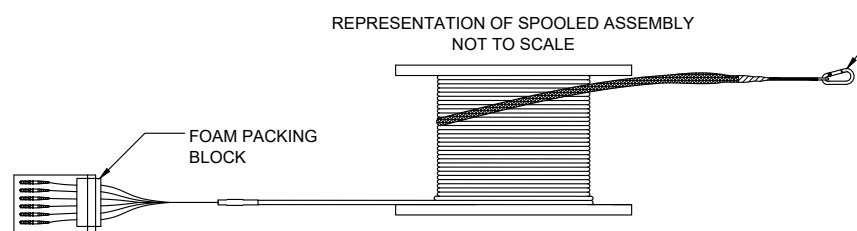


NOTES: UNLESS OTHERWISE SPECIFIED

1. MATERIALS AND COMPONENTS ARE RoHS/REACH COMPLIANT.
2. CONNECTORS MEET THE REQUIREMENTS OF ANSI/TIA 568-C.3
3. 100% TESTED FOR OPTICAL PERFORMANCE, END FACE CRITERIA AND CLEANLINESS.
4. CABLE ASSEMBLIES ARE MANUFACTURED TO C ENTERPRISES STANDARDS.
5. STANDARDS AND SPECIFICATIONS AVAILABLE UPON REQUEST.
6. NOT ALL FIBERS ARE SHOWN DO TO SPACE CONSTRAINT.
7. STAGGERED END WITH PULLING EYE
 - 7.1. CONNECTOR PAIRS STAGGERED BY 1 INCH INCREMENTS.
 - 7.2. PAIRS STAGGER ALTERNATE BY INCREASING AND DECREASING FROM DEFINED BREAKOUT LENGTH.
 - 7.3. PAIRS 1-2 LONGEST: 30". PAIRS 23-24 SHORTEST: 19".

REV	ECR	DESCRIPTION	BY	DATE	CHECKED
A	-	INITIAL RELEASE	K.T.	05/04/2016	A.J.
B	-	CABLE CORRECTION	K.T.	12/19/2016	A.J.

 HEAT SHRINK FOR STRAIN RELIEF

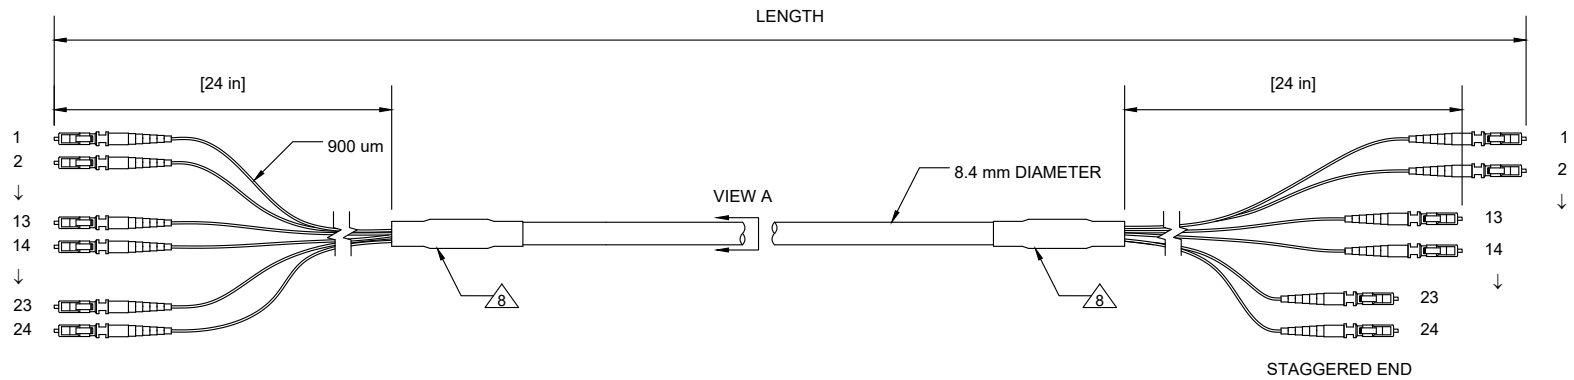

FIBERS AND CONNECTORS SECURED BY 12 IN A FOAM BLOCK AND BAGGED.

DRAWN BY:	K. THOMAS	12/01/2016
APVD BY:	A. JENSEN	12/19/2016



C ENTERPRISES
2445 CADES WAY
VISTA CA 92081
760-599-5111

BILL OF MATERIALS		
ITEM	QTY	PRODUCT
4	1	MUTIMODE TEST REPORT
3	1	PULLING EYE: 24 FIBERS
2	AR	MULTIMODE 50 um OM3 900 um IN/OUT OFNP CABLE; BLACK; PERFORMA
1	48	LC PC POLISH PERFORMA CONNECTOR UNCLIPPED; BEIGE HOUSING, BLACK BOOT: PERFORMA

TEST LIMITS AT 1300 nm			
MAX. I.L.	TYP. I.L.	MIN. R.L.	TYP. R.L.
<=0.75dB	0.20dB	N/A	N/A

DIMENSIONS: METRIC [IMPERIAL]

PROPRIETARY AND CONFIDENTIAL

THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION OF C ENTERPRISES. NOT TO BE USED, COPIED, OR DISCLOSED WITHOUT WRITTEN PERMISSION. ALL RIGHTS RESERVED.

TITLE: JPPO24LBLB9RPPX		REV
SIZE	DWG. NO.	B
A	JPPO24LBLB9RPPX	
SCALE: NOT TO SCALE		SHEET 1 OF 1