


NOTES: UNLESS OTHERWISE SPECIFIED

1. MATERIALS AND COMPONENTS ARE RoHS/REACH COMPLIANT.
2. ASSEMBLY MEET THE REQUIREMENTS OF ANSI/TIA 568-C.3.
3. 100% TESTED FOR OPTICAL PERFORMANCE, END FACE CRITERIA AND CLEANLINESS.
4. CABLE ASSEMBLIES ARE MANUFACTURED TO C ENTERPRISES STANDARDS.
5. STANDARDS AND SPECIFICATIONS AVAILABLE UPON REQUEST.
6. INDIVIDUALLY BAGGED.
7. LLU: LENGTH AND UNIT OF MEASURE.


REV	ECR	DESCRIPTION	BY	DATE	CHECKED
A	-	INITIAL RELEASE	K.T.	04/12/2017	A.J.

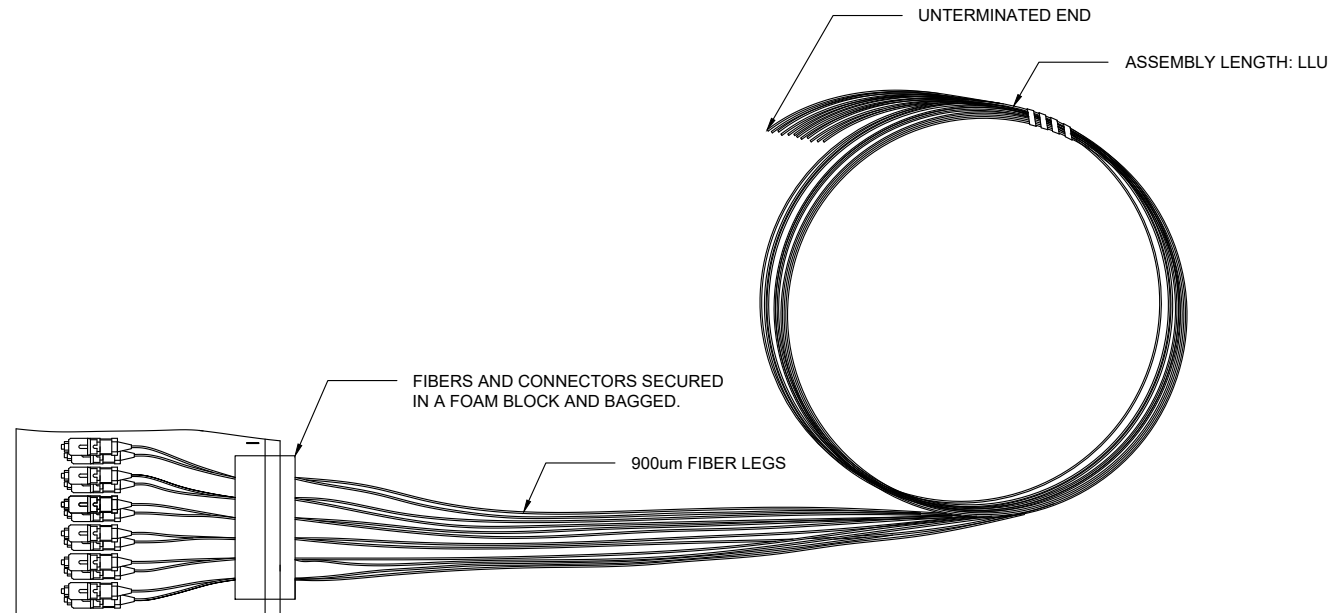

FIBER LEG COLOR	
1	BLUE
2	ORANGE
3	GREEN
4	BROWN
5	GREY
6	WHITE
7	RED
8	BLACK
9	YELLOW
10	PURPLE
11	ROSE
12	AQUA

BILL OF MATERIALS		
ITEM	QUANTITY	COMPONENT
2	AR	FIBER SINGLE-MODE TB DIST CABLE: CORNING
1	12	SC-NO CLIP UPC POLISH; BLUE HOUSING, BLUE BOOT: CORNING

SC UPC POLISH CORNING CONNECTOR			
FIBER TYPE:	SINGLE-MODE		
CONNECTION DURABILITY:	500 MATINGS		
OPERATING ENVIRONMENT:	-40°C to +75°C		
TEST LIMITS AT 1310 nm			
MAX. I.L.	TYP. I.L.	MIN. R.L.	TYP. R.L.
≤0.50dB	0.20dB	≥50dB	60dB

DESCRIPTION:		SC-UNCLIPPED UPC x12-FIBER PIGTAIL SET, SINGLE-MODE TIGHT BUFFERED DIST CABLE, 900 um, CORNING, INDIVIDUAL BAG			
DRAWN BY:	K. THOMAS	04/12/2017	 C ENTERPRISES 2445 CADES WAY VISTA CA 92081 760-599-5111		
APVD BY:	A. JENSEN	04/12/2017			
DIMENSIONS: METRIC [IMPERIAL]			TITLE: SM 12 FIBER SC PIGTAIL CORNING		
PROPRIETARY AND CONFIDENTIAL			SIZE	DWG. NO.	REV
THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION OF C ENTERPRISES. NOT TO BE USED, COPIED, OR DISCLOSED WITHOUT WRITTEN PERMISSION. ALL RIGHTS RESERVED.			A	SUBP12SBXXXXXUI	A
SCALE: NOT TO SCALE				SHEET 1 OF 1	