
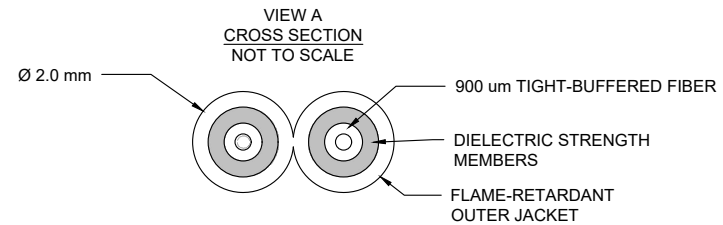



NOTES: UNLESS OTHERWISE SPECIFIED

1. MATERIALS AND COMPONENTS ARE RoHS/REACH COMPLIANT.
2. CONNECTORS MEET THE REQUIREMENTS OF ANSI/TIA 568-C.3
3. 100% TESTED FOR OPTICAL PERFORMANCE, END FACE CRITERIA AND CLEANLINESS.
4. CLIPPED A-B / B-A.
5. CABLE ASSEMBLIES ARE MANUFACTURED TO C ENTERPRISES STANDARDS.
6. STANDARDS AND SPECIFICATIONS AVAILABLE UPON REQUEST.

REV	ECR	DESCRIPTION	BY	DATE	CHECKED
A	-	INITIAL RELEASE	M.K.	02/23/2018	A.J

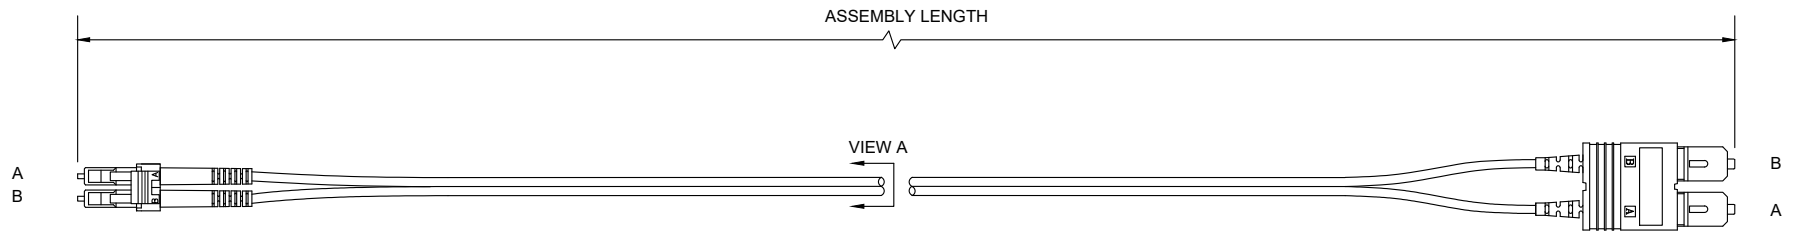

BILL OF MATERIALS		
ITEM	QTY	COMPONENT
3	AR	MULTIMODE OM1 ZIP OFNP 2.0 mm CABLE, ORANGE: CORNING.
2	2	SC-CLIPPED PC POLISH, BEIGE HOUSING, BLACK BOOT: CORNING.
1	2	LC-CLIPPED PC POLISH, BEIGE HOUSING, BLACK BOOT: CORNING.

DESCRIPTION: LC-CLIP PC POLISH / SC-CLIP PC POLISH, x 2-FIBER 62.5 um OM1 OFNP 2.0 mm ZIP CABLE, ULTRA.											
DRAWN BY:	M. KHANFIR	02/23/2018	 C ENTERPRISES 2445 CADES WAY VISTA CA 92081 760-599-5111								
APVD BY:	A. JENSEN	02/23/2018									
DIMENSIONS: METRIC [IMPERIAL]		TITLE: LC-CLIP/ SC-CLIP ZIP OM1 OFNP 2 mm									
PROPRIETARY AND CONFIDENTIAL		SIZE	REV								
THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION OF C ENTERPRISES. NOT TO BE USED, COPIED, OR DISCLOSED WITHOUT WRITTEN PERMISSION. ALL RIGHTS RESERVED.		A	A								
<table border="1"> <thead> <tr> <th>MAX. I.L.</th> <th>TYP. I.L.</th> <th>MIN. R.L.</th> <th>TYP. R.L.</th> </tr> </thead> <tbody> <tr> <td>≤0.75dB</td> <td>0.20dB</td> <td>N/A</td> <td>N/A</td> </tr> </tbody> </table>		MAX. I.L.	TYP. I.L.	MIN. R.L.	TYP. R.L.	≤0.75dB	0.20dB	N/A	N/A	DWG. NO. MPQZ02LCSCXXXUX SCALE: NOT TO SCALE SHEET 1 OF 1	
MAX. I.L.	TYP. I.L.	MIN. R.L.	TYP. R.L.								
≤0.75dB	0.20dB	N/A	N/A								