


NOTES: UNLESS OTHERWISE SPECIFIED

1. MATERIALS AND COMPONENTS ARE RoHS/REACH COMPLIANT.
2. ASSEMBLY MEETS THE REQUIREMENTS OF ANSI/TIA 568-C.3
3. 100% TESTED FOR OPTICAL PERFORMANCE, END FACE CRITERIA AND CLEANLINESS.
4. CABLE ASSEMBLIES ARE MANUFACTURED TO C ENTERPRISES STANDARDS.
5. STANDARDS AND SPECIFICATIONS AVAILABLE UPON REQUEST.
6. 24 FIBER ASSEMBLY. FOR DRAWING CLARITY NOT ALL CONNECTORS SHOWN.
7. FIBER LEG LABEL. PLACED APPROX. 6 INCHES FROM CONNECTOR.
8. HEAT SHRINK FOR STRAIN RELIEF.
9. C-BREAK. OVERALL DIAMETER: 0.625 INCHES.

REV	ECR	DESCRIPTION	BY	DATE	CHECKED
A	-	INITIAL RELEASE	K.T.	06/24/2016	A.J.

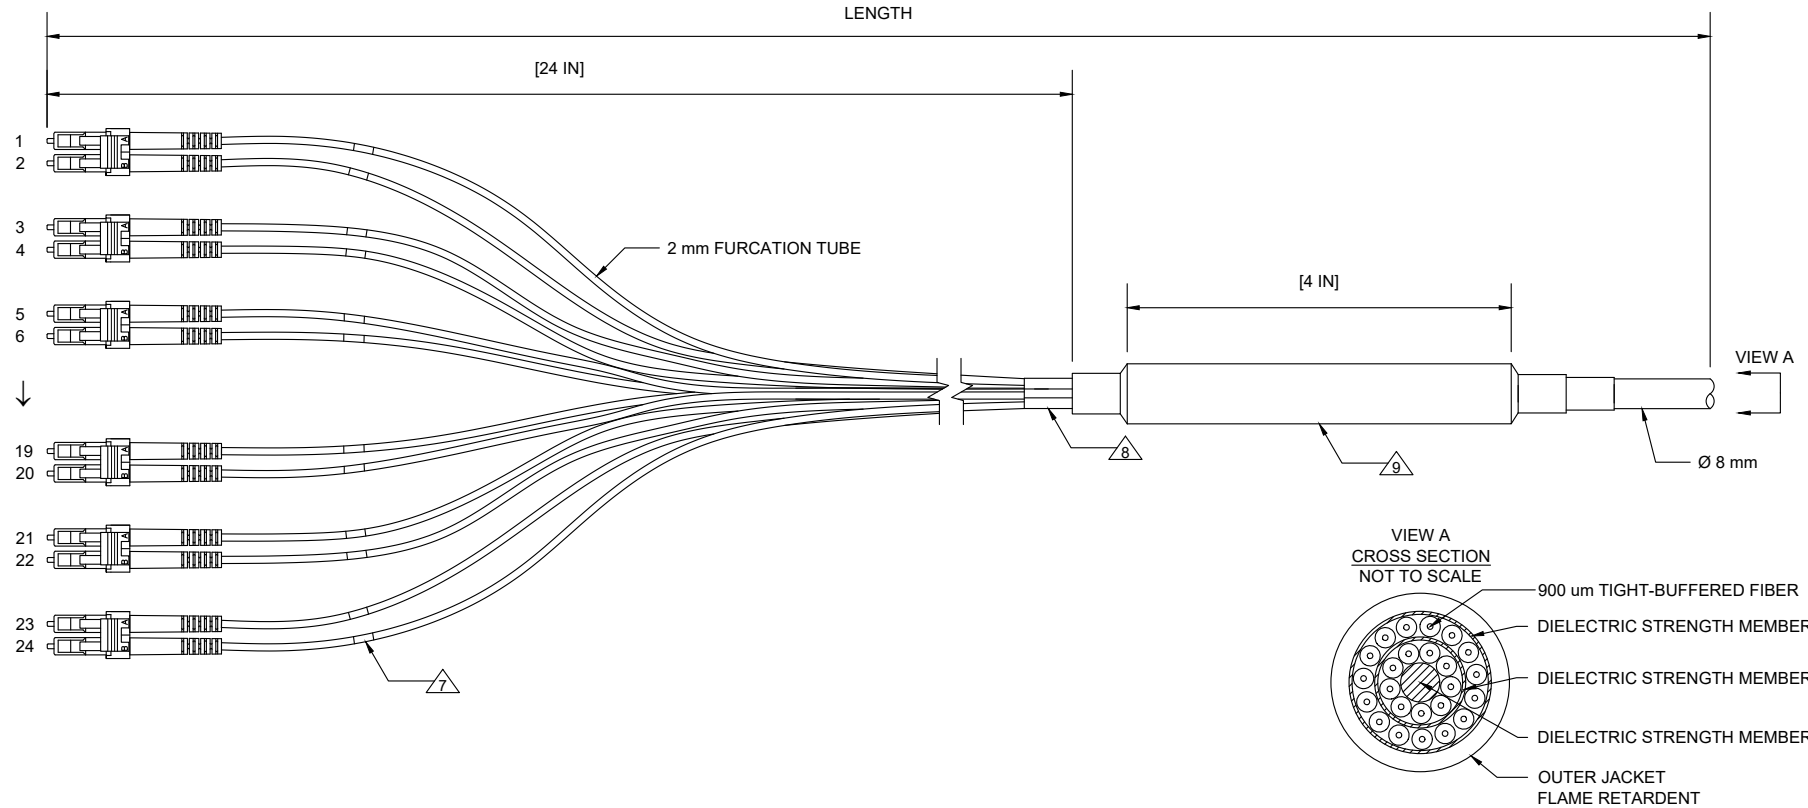

DRAWN BY:	K. THOMAS	06/24/2016
APVD BY:	A. JENSEN	06/24/2016



C ENTERPRISES  
2445 CADES WAY  
VISTA CA 92081  
760-599-5111

BILL OF MATERIALS			TEST LIMITS AT 1310 nm				DIMENSIONS: METRIC [IMPERIAL]		TITLE: SURI24LCXXFXXUX		
ITEM	QTY	COMPONENT	MAX. I.L.	TYP. I.L.	MIN. R.L.	TYP. R.L.	PROPRIETARY AND CONFIDENTIAL	SIZE	DWG. NO.	REV	
3	1	C-BREAK 2: SINGLE LEG BREAKOUT; YELLOW					THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION OF C ENTERPRISES. NOT TO BE USED, COPIED, OR DISCLOSED WITHOUT WRITTEN PERMISSION. ALL RIGHTS RESERVED.	A	SURI24LCXXFXXUX	A	
2	AR	SINGLE-MODE OS2 OFNR MIC® CABLE, YELLOW: CORNING									
1	24	LC-CLIPPED UPC POLISH; BLUE HOUSING, BLUE BOOT: CORNING	<=0.50dB	0.20dB	>=50dB	60dB					
							SCALE: NOT TO SCALE		SHEET 1 OF 1		