



NOTES: UNLESS OTHERWISE SPECIFIED

1. MATERIALS AND COMPONENTS ARE RoHS/REACH COMPLIANT.
2. ASSEMBLY MEET THE REQUIREMENTS OF ANSI/TIA 568-C.3.
3. 100% TESTED FOR OPTICAL PERFORMANCE, END FACE CRITERIA AND CLEANLINESS.
4. CABLE ASSEMBLIES ARE MANUFACTURED TO C ENTERPRISES STANDARDS.
5. STANDARDS AND SPECIFICATIONS AVAILABLE UPON REQUEST.
6. REFER TO SALES FOR FURTHER DETAILS.

REV	ECR	DESCRIPTION	BY	DATE	CHECKED
A	-	INITIAL RELEASE	M. K	03/07/2018	A.J.

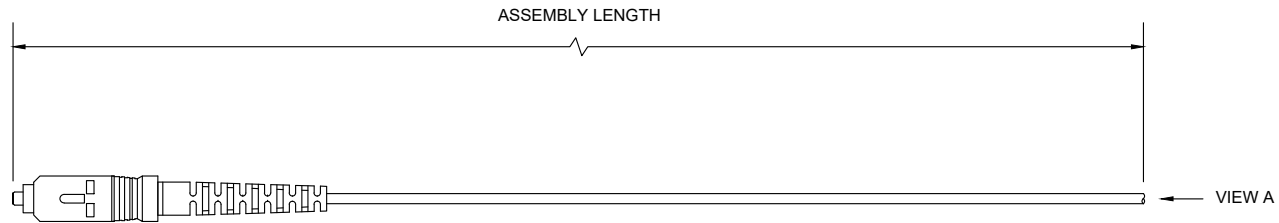

VIEW A
CROSS-SECTION
NOT TO SCALE

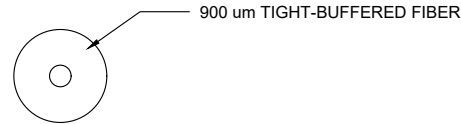

PERFORMANCE RANGE: PERFORMA
ASSEMBLY OPTIONS
CONNECTORS: LC, SC, FC, ST.
CONNECTOR POLISH: UPC, APC, PC
FIBER MODE: SINGLE-MODE, OM1, OM2, OM3, OM4
CABLE JACKET RATING: OFNR.

SINGLE-MODE UPC TEST LIMITS AT 1310 nm			
MAX. I.L.	TYP. I.L.	MIN. R.L.	TYP. R.L.
≤0.50dB	0.20dB	≥50dB	60dB

SINGLE-MODE APC TEST LIMITS AT 1310 nm			
MAX. I.L.	TYP. I.L.	MIN. R.L.	TYP. R.L.
≤0.50dB	0.20dB	≥65dB	68dB

MULTIMODE TEST LIMITS AT 1300 nm			
MAX. I.L.	TYP. I.L.	MIN. R.L.	TYP. R.L.
≤0.75dB	0.20dB	N/A	N/A

<p>LC</p>	<p>SC</p>
<p>FC</p>	<p>ST</p>

DESCRIPTION: 900um FIBER SIMPLEX PIGTAILS, PERFORMA			
DRAWN BY:	M. KHANFIR	03/07/2018	<p>C ENTERPRISES 2445 CADES WAY VISTA CA 92081 760-599-5111</p>
APVD BY:	A. JENSEN	03/07/2018	
DIMENSIONS: METRIC [IMPERIAL]		TITLE: PERFORMA PIGTAILS	
PROPRIETARY AND CONFIDENTIAL THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION OF C ENTERPRISES. NOT TO BE USED, COPIED, OR DISCLOSED WITHOUT WRITTEN PERMISSION. ALL RIGHTS RESERVED.		SIZE A	DWG. NO. PERFORMA_PIGTAILS
		SCALE: NOT TO SCALE	REV A
		SHEET 1 OF 1	