
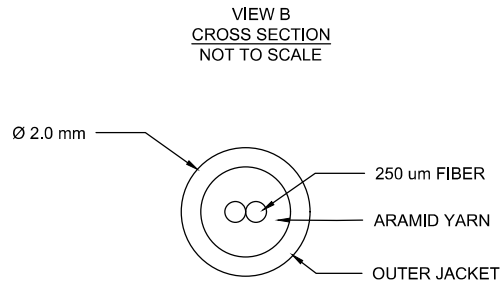



NOTES: UNLESS OTHERWISE SPECIFIED

1. MATERIALS AND COMPONENTS ARE RoHS/REACH COMPLIANT.
2. CONNECTORS MEET THE REQUIREMENTS OF ANSI/TIA 568-C.3
3. 100% TESTED FOR OPTICAL PERFORMANCE, END FACE CRITERIA AND CLEANLINESS.
4. CLIPPED A-B / B-A.
5. CABLE ASSEMBLIES ARE MANUFACTURED TO C ENTERPRISES STANDARDS.
6. STANDARDS AND SPECIFICATIONS AVAILABLE UPON REQUEST.

REV	ECR	DESCRIPTION	BY	DATE	CHECKED
A	-	INITIAL RELEASE	M.K.	11/19/2018	A.J

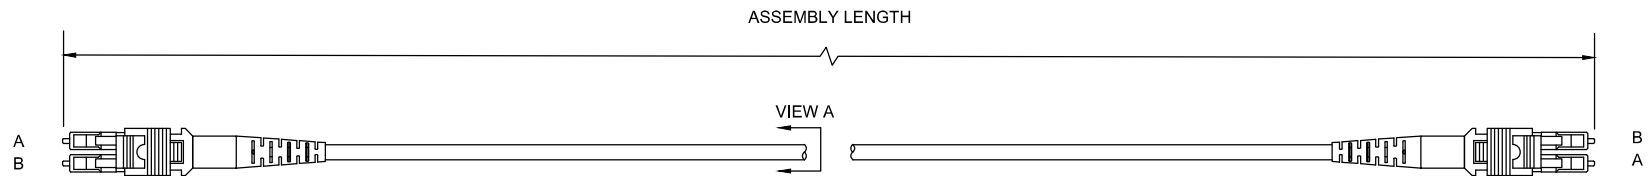

DESCRIPTION:		LC-UNIBOOT PC / LC-UNIBOOT PC x 2-FIBER OM4 MIC 250 um OFNR 2.0 mm ROUND CABLE			
DRAWN BY:	M. KHANFIR	11/19/2018	 C-ENTERPRISES Connecting Today's Infrastructures C ENTERPRISES 2445 CADES WAY VISTA CA 92081 760-599-5111		
APVD BY:	A. JENSEN	11/19/2018			
DIMENSIONS: METRIC [IMPERIAL]			TITLE: LC-UNIBOOT/ LC-UNIBOOT OM4 OFNR 2 mm		
PROPRIETARY AND CONFIDENTIAL			SIZE	DWG. NO.	REV
THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION OF C ENTERPRISES. NOT TO BE USED, COPIED, OR DISCLOSED WITHOUT WRITTEN PERMISSION. ALL RIGHTS RESERVED.			A	HPRG02LSLSXXXPX	A
SCALE: NOT TO SCALE				SHEET 1 OF 1	

BILL OF MATERIALS			PC TEST LIMITS AT 1300 nm			
ITEM	QTY	COMPONENT	MAX. I.L.	TYP. I.L.	MIN. R.L.	TYP. R.L.
2	AR	MULTIMODE OM4 MIC 250 um OFNR 2.0 mm CABLE, AQUA: CORNING GLASS AND PRINT, PERFORMA				
1	2	LC-UNIBOOT PC POLISH, BLACK HOUSING, AQUA BOOT: PERFORMA	≤0.75dB	0.20dB	N/A	N/A