


NOTES: UNLESS OTHERWISE SPECIFIED

1. MATERIALS AND COMPONENTS ARE RoHS/REACH COMPLIANT.
2. CONNECTORS MEET THE REQUIREMENTS OF ANSI/TIA 568-C.3
3. 100% TESTED FOR OPTICAL PERFORMANCE, END FACE CRITERIA AND CLEANLINESS.
4. CABLE ASSEMBLIES ARE MANUFACTURED TO C ENTERPRISES STANDARDS.
5. STANDARDS AND SPECIFICATIONS AVAILABLE UPON REQUEST.

REV	ECR	DESCRIPTION	BY	DATE	CHECKED
A	-	INITIAL RELEASE	K.T.	12/19/2016	A.J.

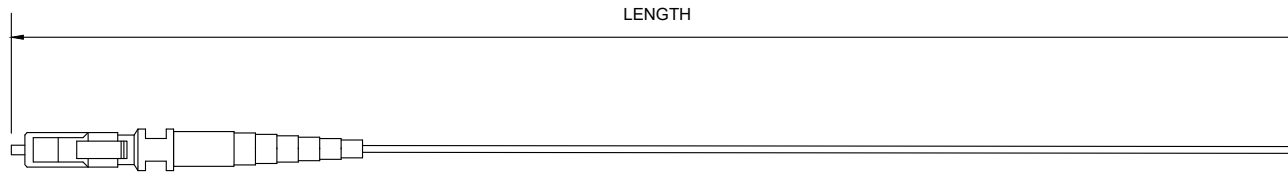

DESCRIPTION: LC-NOCLIP PC POLISH / UNTERMINATED SIMPLEX FIBER OM4 900 um TIGHT BUFFER

DRAWN BY:	K. THOMAS	12/19/2016
APVD BY:	A. JENSEN	12/19/2016



C ENTERPRISES
2445 CADES WAY
VISTA CA 92081
760-599-5111

DIMENSIONS: METRIC [IMPERIAL]

TITLE: LC/UNTERM OM4 900 um SIMPLEX

BILL OF MATERIALS

ITEM	QTY	COMPONENT
2	AR	MULTIMODE OM4 900 um TIGHT BUFFER SIMPLEX FIBER; AQUA: PERFORMA
1	2	LC-NOCLIP OM4 PC POLISH; BEIGE HOUSING, 900 um BLACK BOOT: PERFORMA

TEST LIMITS AT 1300 nm			
MAX. I.L.	TYP. I.L.	MIN. R.L.	TYP. R.L.
<=0.75dB	0.20dB	N/A	25dB

PROPRIETARY AND CONFIDENTIAL
THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION OF C ENTERPRISES. NOT TO BE USED, COPIED, OR DISCLOSED WITHOUT WRITTEN PERMISSION. ALL RIGHTS RESERVED.

SIZE	DWG. NO.	REV
A	HPBS01LBXXXXPX	A
SCALE: NOT TO SCALE		SHEET 1 OF 1