



NOTES: UNLESS OTHERWISE SPECIFIED

1. MATERIALS AND COMPONENTS ARE RoHS/REACH COMPLIANT.
2. CONNECTORS MEET THE REQUIREMENTS OF ANSI/TIA 568-C.3
3. 100% TESTED FOR OPTICAL PERFORMANCE, END FACE CRITERIA AND CLEANLINESS.
4. CABLE ASSEMBLIES ARE MANUFACTURED TO C ENTERPRISES STANDARDS.
5. STANDARDS AND SPECIFICATIONS AVAILABLE UPON REQUEST.
6. 72 FIBER ASSEMBLY. FOR DRAWING CLARITY NOT ALL CONNECTORS SHOWN.
7. HEAT SHRINK-ADHESIVE, SECURED ARAMID YARN AND JACKET.
8. HEAT SHRINK FOR STRAIN RELIEF.

REV	ECR	DESCRIPTION	BY	DATE	CHECKED
A	-	INITIAL RELEASE	M.K.	12/19/2017	A.J

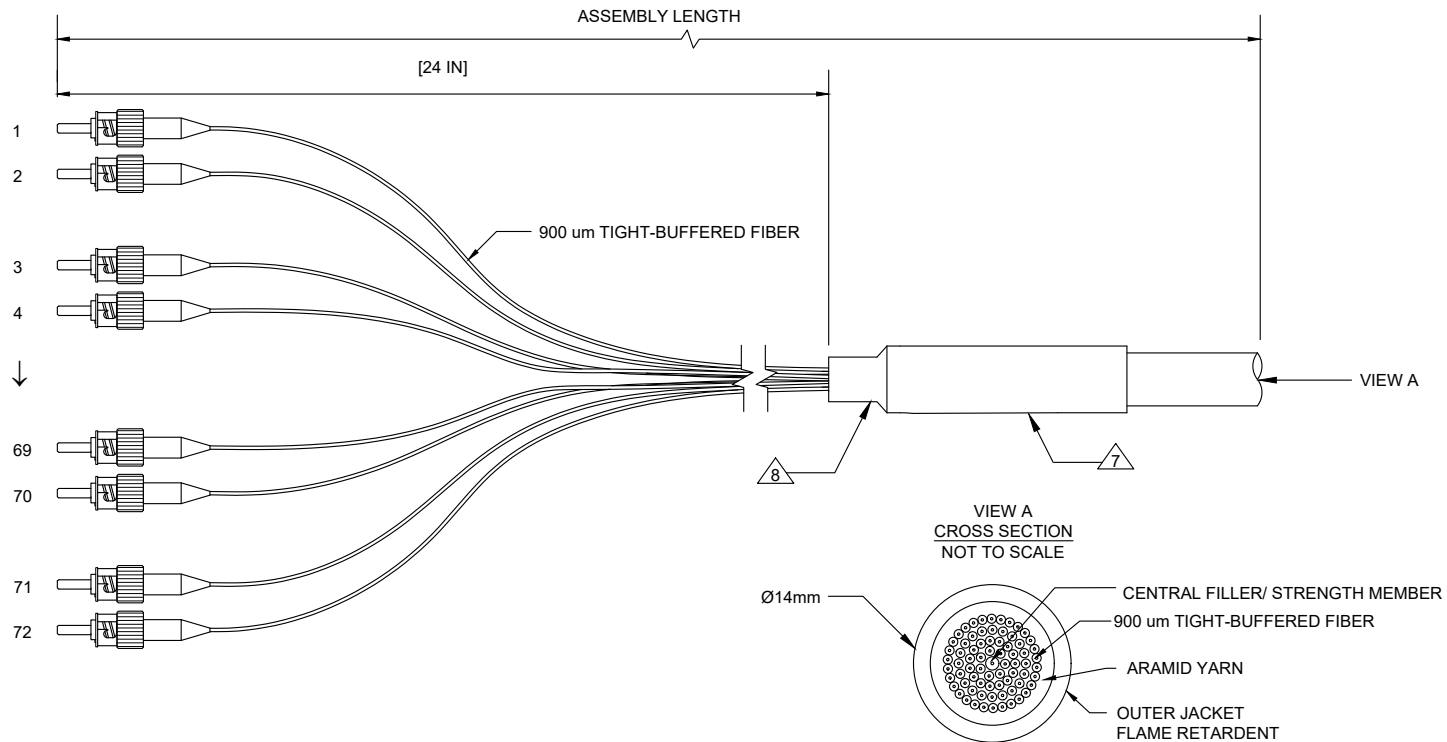

DESCRIPTION: ST UPC / UNTERMINATED., 72 FIBER SINGLE-MODE OFNR IN/OUT CABLE, 900 um BREAKOUT			
DRAWN BY:	M. KHANFIR	12/19/2017	 C ENTERPRISES 2445 CADES WAY VISTA CA 92081 760-599-5111
APVD BY:	A. JENSEN	12/20/2017	
DIMENSIONS: METRIC [IMPERIAL]		TITLE: ST UPC/ UNTERM, 72 FIBER IN/OUT, 900um BREAKOUT	
PROPRIETARY AND CONFIDENTIAL		SIZE: A	REV: A
THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION OF C ENTERPRISES. NOT TO BE USED, COPIED, OR DISCLOSED WITHOUT WRITTEN PERMISSION. ALL RIGHTS RESERVED.		DWG. NO. SURO72STXX9XXPX	
		SCALE: NOT TO SCALE	SHEET 1 OF 1

BILL OF MATERIALS			UPC TEST LIMITS AT 1310 nm			
ITEM	QTY	COMPONENT	MAX. I.L.	TYP. I.L.	MIN. R.L.	TYP. R.L.
2	AR	72 FIBER SINGLE-MODE OS2 OFNR IN/OUT CABLE; BLACK, PERFORMA				
1	72	ST UPC POLISH, METAL HOUSING, BLUE BOOT; PERFORMA	≤0.50dB	0.20dB	≥50dB	60dB