


NOTES: UNLESS OTHERWISE SPECIFIED



1. MATERIALS AND COMPONENTS ARE RoHS/REACH COMPLIANT.
2. CONNECTORS MEET THE REQUIREMENTS OF ANSI/TIA 568-C.3
3. 100% TESTED FOR OPTICAL PERFORMANCE, END FACE CRITERIA AND CLEANLINESS.
4. CABLE ASSEMBLIES ARE MANUFACTURED TO C ENTERPRISES STANDARDS.
5. METHOD B POLARITY DEPICTED.
6. STANDARDS AND SPECIFICATIONS AVAILABLE UPON REQUEST.

- 7 HEAT SHRINK.
- 8 C-BREAK. OVERALL DIAMETER: 16 mm MAX.
- 9 HEAT SHRINK FOR STRAIN RELIEF.
- 10 FIBER LEG LABEL. PLACED APPROX. 6 INCHES FROM CONNECTOR TIP.

REV	ECR	DESCRIPTION	BY	DATE	CHECKED
A	-	INITIAL RELEASE	K.T.	10/20/2017	A.J.

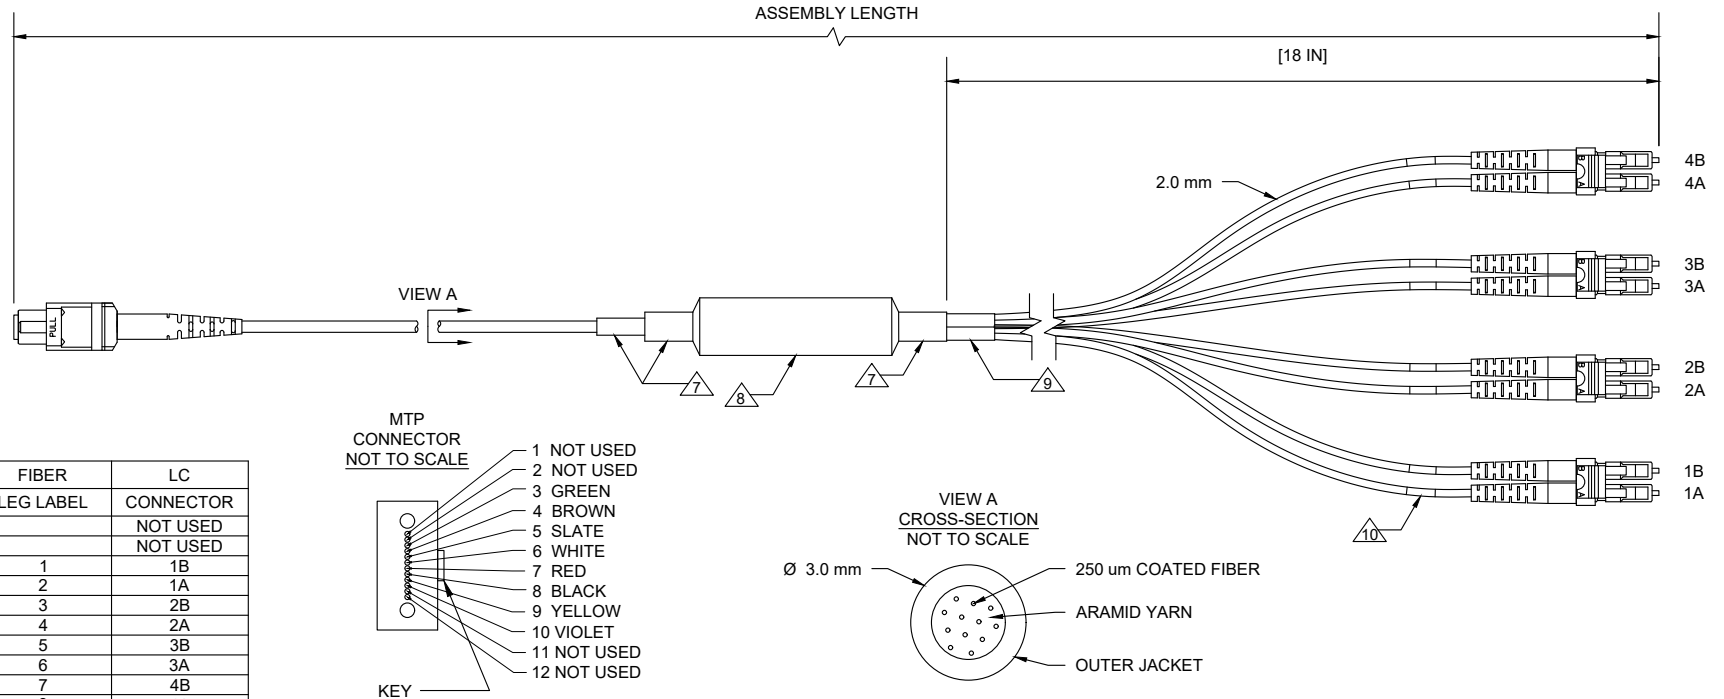

MTP 12 POSITION	FIBER LEG LABEL	LC CONNECTOR
1		NOT USED
2		NOT USED
3	1	1B
4	2	1A
5	3	2B
6	4	2A
7	5	3B
8	6	3A
9	7	4B
10	8	4A
11		NOT USED
12		NOT USED

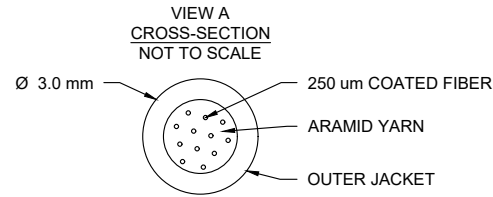


BILL OF MATERIALS

ITEM	QTY	COMPONENT
6	1	MULTIMODE PC TEST REPORT
5	1	MULTIMODE PC MTP TEST REPORT
4	1	C-BREAK 2: 18in SINGLE LEG BREAKOUT, 2 mm LEGS, AQUA
3	AR	MULTIMODE OM4 12-FIBER NON SUB-UNITIZED 3.0 mm OFNP CABLE; AQUA: PERFORMA, CORNING GLASS AND PRINT
2	8	LC-CLIPPED PC POLISH, BEIGE HOUSING, WHITE BOOT: PERFORMA
1	1	MTP-FEMALE MULTIMODE PC POLISH; AQUA HOUSING, BLACK BOOT: CORNING

PC TEST LIMITS AT 1310 nm			
MAX. I.L.	TYP. I.L.	MIN. R.L.	TYP. R.L.
≤0.75dB	0.20dB	N/A	N/A

MTP PC TEST LIMITS AT 1310 nm			
MAX. I.L.	TYP. I.L.	MIN. R.L.	TYP. R.L.
≤0.75dB	0.20dB	N/A	N/A

DESCRIPTION:		MTP-FEMALE PC POLISH/LC-CLIPPED PC POLISH x 8-FIBER OM4 OFNP MIC 250 um w/CP&G FIBER, 18in SINGLE LEG BREAKOUT, TEST REPORT, TYPE B POLARITY			
DRAWN BY:	K. THOMAS	10/20/2017	 C ENTERPRISES 2445 CADES WAY VISTA CA 92081 760-599-5111		
APVD BY:	A. JENSEN	10/20/2017			
DIMENSIONS: METRIC [IMPERIAL]			TITLE: MTP-F/LC OM4 8-FIBER TYPE B		
PROPRIETARY AND CONFIDENTIAL			SIZE	DWG. NO.	REV
THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION OF C ENTERPRISES. NOT TO BE USED, COPIED, OR DISCLOSED WITHOUT WRITTEN PERMISSION. ALL RIGHTS RESERVED.			A	HPPG08LCMTFRXPJ	A
			SCALE: NOT TO SCALE		SHEET 1 OF 1