



NOTES: UNLESS OTHERWISE SPECIFIED

1. MATERIALS AND COMPONENTS ARE RoHS/REACH COMPLIANT.
2. CONNECTORS MEET THE REQUIREMENTS OF ANSI/TIA 568-C.3
3. 100% TESTED FOR OPTICAL PERFORMANCE, END FACE CRITERIA AND CLEANLINESS.
4. CABLE ASSEMBLIES ARE MANUFACTURED TO C ENTERPRISES STANDARDS.
5. STANDARDS AND SPECIFICATIONS AVAILABLE UPON REQUEST.
6. NOT ALL FIBERS ARE SHOWN DO TO SPACE CONSTRAINTS.
7. FIBER LEG LABEL. PLACED APPROX. 6 INCHES FROM CONNECTOR.
8. HEAT SHRINK FOR STRAIN RELIEF.
9. HEAT SHRINK.
10. C-BREAK. OVERALL DIAMETER: 16 mm.

REV	ECR	DESCRIPTION	BY	DATE	CHECKED
A	-	INITIAL RELEASE	K.T.	05/23/2016	A.J.

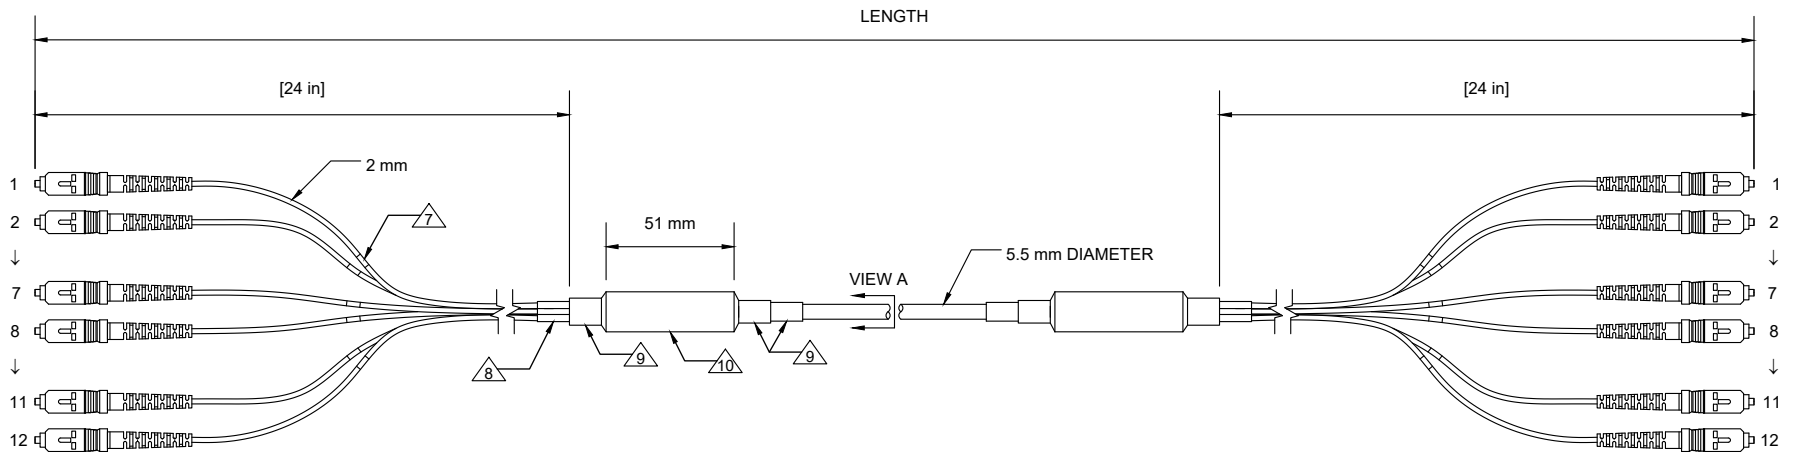

VIEW A  
CROSS SECTION  
NOT TO SCALE

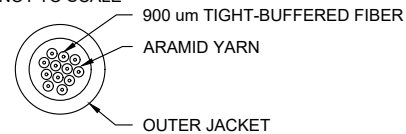

BILL OF MATERIALS		
NUMBER	AMOUNT	PRODUCT
4	2	C-BREAK 2: SINGLE LEG BREAKOUT
3	AR	MULTIMODE 50 um OM4 DISTRIBUTION OFNP CABLE; AQUA
2	24	SC PERFORMA CONNECTOR BOOT; BLACK
1	24	SC PC POLISH PERFORMA CONNECTOR UNCLIPPED; BEIGE

DRAWN BY:	K. THOMAS	05/23/2016
APVD BY:	A. JENSEN	05/23/2016



C ENTERPRISES  
2445 CADES WAY  
VISTA CA 92081  
760-599-5111

DIMENSIONS: METRIC [IMPERIAL]  
PROPRIETARY AND CONFIDENTIAL  
THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION OF C ENTERPRISES. NOT TO BE USED, COPIED, OR DISCLOSED WITHOUT WRITTEN PERMISSION. ALL RIGHTS RESERVED.

TITLE: HPPI12SBSBFXXPX		REV
SIZE	DWG. NO.	A
A	HPPI12SBSBFXXPX	A
SCALE: NOT TO SCALE		SHEET 1 OF 1