


NOTES: UNLESS OTHERWISE SPECIFIED

1. MATERIALS AND COMPONENTS ARE RoHS/REACH COMPLIANT.
2. CONNECTORS MEET THE REQUIREMENTS OF ANSI/TIA 568-C.3
3. 100% TESTED FOR OPTICAL PERFORMANCE, END FACE CRITERIA AND CLEANLINESS.
4. CABLE ASSEMBLIES ARE MANUFACTURED TO C ENTERPRISES STANDARDS.
5. STANDARDS AND SPECIFICATIONS AVAILABLE UPON REQUEST.

REV	ECR	DESCRIPTION	BY	DATE	CHECKED
A	-	INITIAL RELEASE	M. K	12/05/2019	A.J

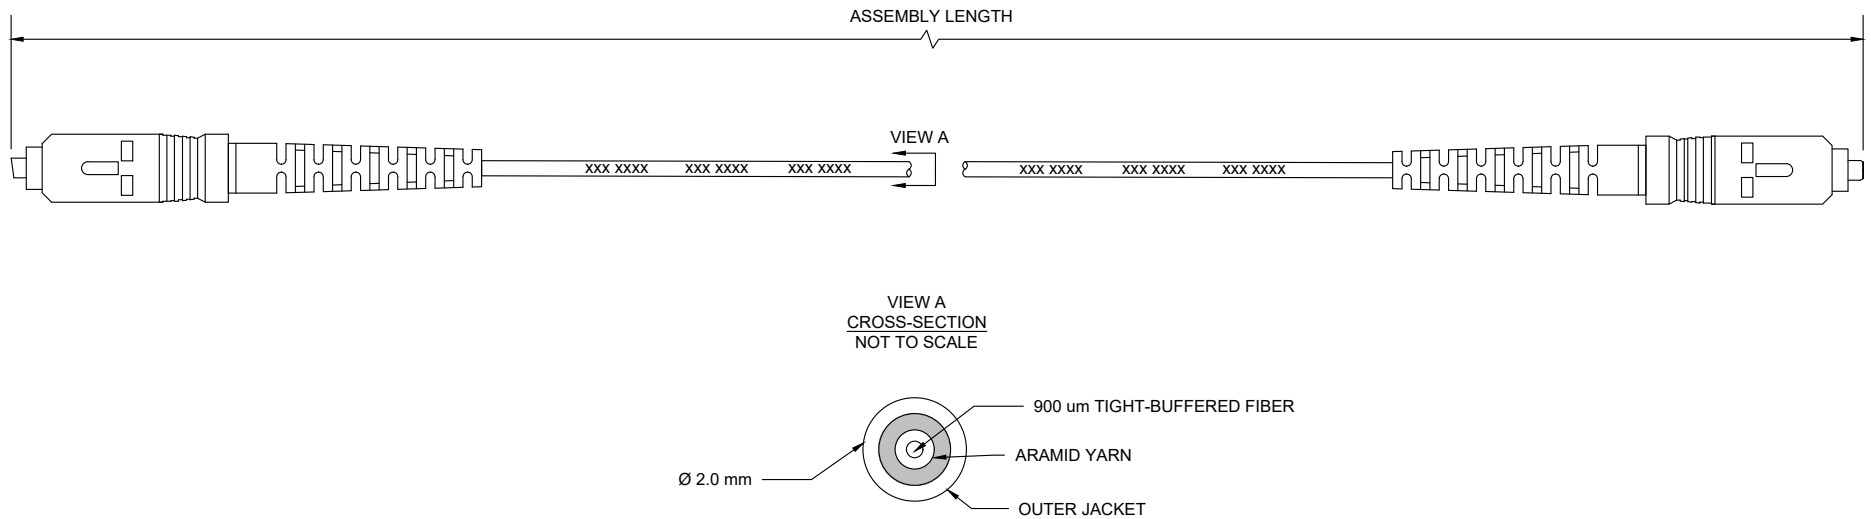

BILL OF MATERIALS			APC TEST LIMITS AT 1310 nm				DESCRIPTION: SC APC POLISH / SC UPC POLISH SINGLE-MODE 2.0 mm SIMPLEX OFNR CABLE, PERFORMA.		
ITEM	QTY	COMPONENT	MAX. I.L.	TYP. I.L.	MIN. R.L.	TYP. R.L.	DRAWN BY:	M. KHANFIR	12/05/2019
5	1	SINGLE-MODE APC TEST REPORT	≤0.50dB	0.20dB	≥65dB	68dB	APVD BY:	A. JENSEN	12/05/2019
4	1	SINGLE-MODE UPC TEST REPORT	UPC TEST LIMITS AT 1310 nm				DIMENSIONS: METRIC [IMPERIAL]		
3	AR	SINGLE-MODE OS2 OFNR 2 mm SIMPLEX BI-SMF 28 ULTRA CABLE, YELLOW: PERFORMA					TITLE: SC/SC SINGLE-MODE 2.0 mm SIMPLEX		
2	1	SC-UNCLIPPED APC POLISH; GREEN HOUSING, GREEN BOOT: PERFORMA	MAX. I.L.	TYP. I.L.	MIN. R.L.	TYP. R.L.	PROPRIETARY AND CONFIDENTIAL		SIZE
1	1	SC-UNCLIPPED UPC POLISH; BLUE HOUSING, BLUE BOOT: PERFORMA	≤0.50dB	0.20dB	≥50dB	60dB	THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION OF C ENTERPRISES. NOT TO BE USED, COPIED, OR DISCLOSED WITHOUT WRITTEN PERMISSION. ALL RIGHTS RESERVED.		DWG. NO.
							SCALE: NOT TO SCALE		REV
							SHEET 1 OF 1		A



C ENTERPRISES
2445 CADES WAY
VISTA CA 92081
760-599-5111

SBSS01SBSBXRXPX