

NOTES: UNLESS OTHERWISE SPECIFIED


1. MATERIALS AND COMPONENTS ARE RoHS/REACH COMPLIANT.
2. CONNECTORS MEET THE REQUIREMENTS OF ANSI/TIA 568-C.3
3. 100% TESTED FOR OPTICAL PERFORMANCE, END FACE CRITERIA AND CLEANLINESS.
4. CABLE ASSEMBLIES ARE MANUFACTURED TO C ENTERPRISES STANDARDS.
5. STANDARDS AND SPECIFICATIONS AVAILABLE UPON REQUEST.

△6 FIBER LEG LABEL. 2 PLACES.


△7 HEAT SHRINK FOR STRAIN RELIEF. 2 PLACES.

△8 REVERSE C-TERM: ADHESIVE HEAT SHRINK FOR CABLE PROTECTION. 2 PLACES.

REV	ECR	DESCRIPTION	BY	DATE	CHECKED
A	-	INITIAL RELEASE	K.T.	04/26/2022	A.J.

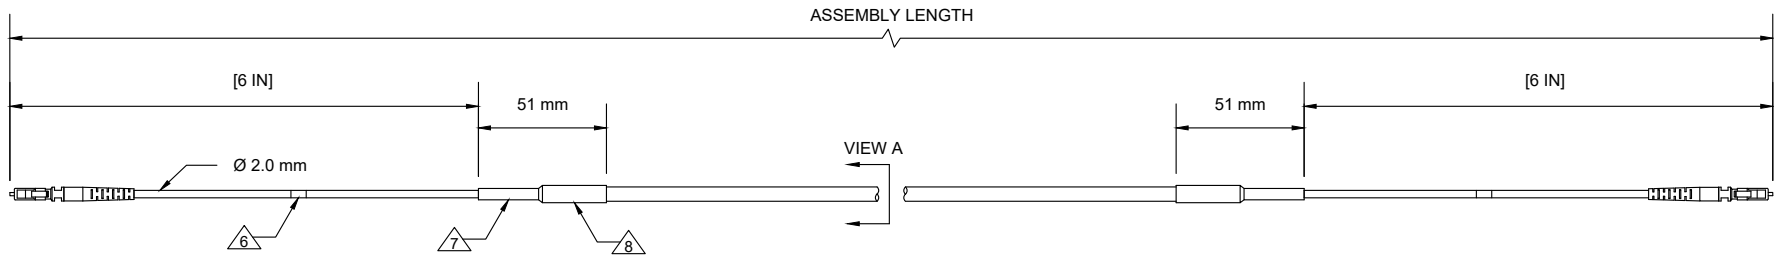


VIEW A
CROSS SECTION
NOT TO SCALE

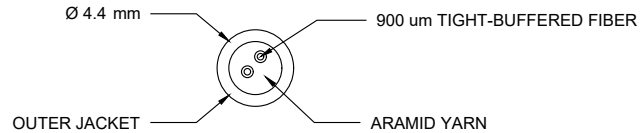

BILL OF MATERIALS		
ITEM	QTY	COMPONENT
4	1	MM TEST REPORT: 1300 nm
3	2	REVERSE C-TERM: 2.0 mm FIBER LEG, BLACK OSP FURCATION, 6 IN.
2	AR	MULTIMODE OM3 x2-FIBER IN/OUT OFNP CABLE; CORNING GLASS & PRINT: BLACK.
1	2	LC NO-CLIP PC POLISH; BIEGE HOUSING, WHITE BOOT. PERFORMA

PC TEST LIMITS AT 1300 nm					
MAX. I.L.	TYP. I.L.	MIN. R.L.	TYP. R.L.		
≤0.75dB	20dB	N/A	N/A		

DESCRIPTION: LC-NOCLIP PC / LC-NOCLIP PC, OM3, OFNP, IN/OUT, 1 FIBER, REVERSE C-TERM 2mm OSP BREAKOUT, TEST REPORT, PERFORMA.					
DRAWN BY:	K. THOMAS	04/26/2022	 C ENTERPRISES 2445 CADES WAY VISTA CA 92081 760-599-5111		
APVD BY:	A. JENSEN	04/26/2022			
DIMENSIONS: METRIC [IMPERIAL]			TITLE: LC/LC NOCLIP OM3 IN/OUT SIMPLEX ASSM		
PROPRIETARY AND CONFIDENTIAL			SIZE	DWG. NO.	REV
THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION OF C ENTERPRISES. NOT TO BE USED, COPIED, OR DISCLOSED WITHOUT WRITTEN PERMISSION. ALL RIGHTS RESERVED.			A	JPPO01LBLBLRXPX	A
SCALE: NOT TO SCALE				SHEET 1 OF 1	