
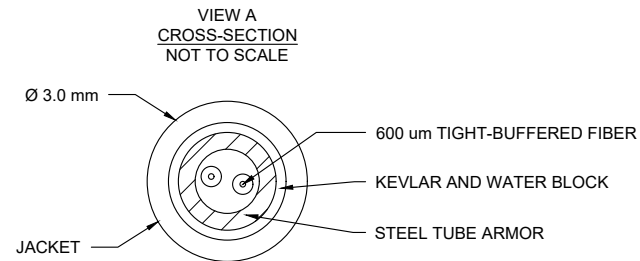


NOTES: UNLESS OTHERWISE SPECIFIED


1. MATERIALS AND COMPONENTS ARE RoHS/REACH COMPLIANT.
2. CONNECTORS MEET THE REQUIREMENTS OF ANSI/TIA 568-C.3
3. 100% TESTED FOR OPTICAL PERFORMANCE, END FACE CRITERIA AND CLEANLINESS.
4. CABLE ASSEMBLIES ARE MANUFACTURED TO C ENTERPRISES STANDARDS.
5. CLIPPED A-B / B-A.
6. STANDARDS AND SPECIFICATIONS AVAILABLE UPON REQUEST.
7. FIBER LEG LABEL. PLACED APPROX. 3 INCHES FROM CONNECTOR TIP.
8. HEAT SHRINK FOR STRAIN RELIEF: 2 PLACES.
9. ADHESIVE HEAT SHRINK: 2 PLACES.

REV	ECR	DESCRIPTION	BY	DATE	CHECKED
A	-	INITIAL RELEASE	A. A.	01/26/2021	A.J.

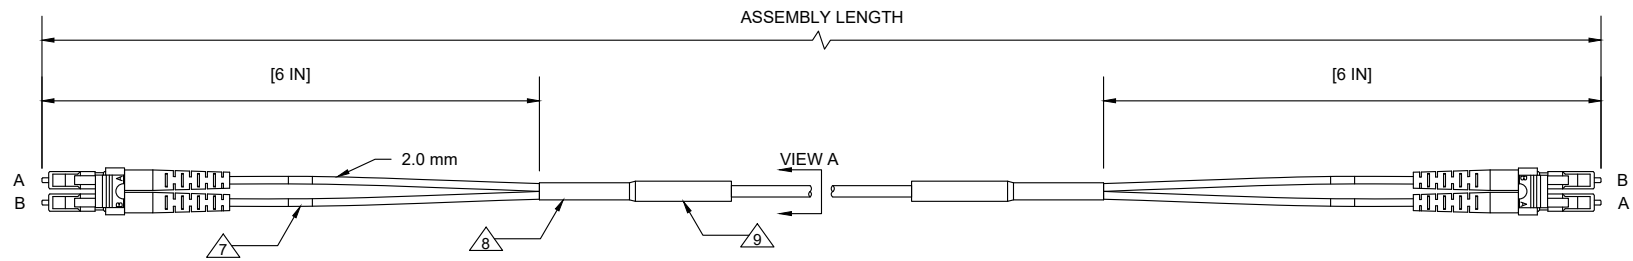

BILL OF MATERIALS		
ITEM	QTY	COMPONENT
3	2	REVERSE C-TERM: 2 mm FIBER LEGS, BLACK.
2	AR	SINGLE-MODE OS2 2-FIBER MICRO ARMOR™ OSP PE TINIFIBER CABLE; BLACK: PERFORMA, CORNING GLASS AND PRINT
1	4	LC-CLIPPED UPC POLISH, BLUE HOUSING, BLUE BOOT: PERFORMA

UPC TEST LIMITS AT 1310 nm			
MAX. I.L.	TYP. I.L.	MIN. R.L.	TYP. R.L.
≤0.50dB	0.20dB	≥50dB	60dB

DESCRIPTION:		LC-CLIPPED/LC-CLIPPED UPC POLISH x2-FIBER OS2 MICRO ARMOR™ OSP PE TINIFIBER CABLE w/CP&G FIBER, REVERSE C-TERM 2mm FURCATION OSP.			
DRAWN BY:	A. AGUILAR	01/26/2021	 C ENTERPRISES 2445 CADES WAY VISTA CA 92081 760-599-5111		
APVD BY:	A. JENSEN	01/26/2021			
DIMENSIONS: METRIC [IMPERIAL]			TITLE: LC/LC x2-FIBER SM OSP MICRO ARMOR™		
PROPRIETARY AND CONFIDENTIAL			SIZE	DWG. NO.	REV
THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION OF C ENTERPRISES. NOT TO BE USED, COPIED, OR DISCLOSED WITHOUT WRITTEN PERMISSION. ALL RIGHTS RESERVED.			A	SUON02LCLCLXXPX	A
SCALE: NOT TO SCALE				SHEET 1 OF 1	