



NOTES: UNLESS OTHERWISE SPECIFIED

1. MATERIALS AND COMPONENTS ARE RoHS/REACH COMPLIANT.
2. CONNECTORS MEET THE REQUIREMENTS OF ANSI/TIA 568-C.3
3. 100% TESTED FOR OPTICAL PERFORMANCE, END FACE CRITERIA AND CLEANLINESS.
4. CABLE ASSEMBLIES ARE MANUFACTURED TO C ENTERPRISES STANDARDS.
5. STANDARDS AND SPECIFICATIONS AVAILABLE UPON REQUEST.
6. FIBER LEG LABEL. PLACED APPROX. 6 INCHES FROM CONNECTOR TIP. 3 PLACES.
7. HEAT SHRINK FOR STRAIN RELIEF.
8. ADHESIVE HEAT SHRINK..
9. 2 FIBERS PER LEG BREAKOUT: OVERALL DIAMETER: 10 mm.

REV	ECR	DESCRIPTION	BY	DATE	CHECKED
A	-	INITIAL RELEASE	K.T.	09/12/2018	A.J.

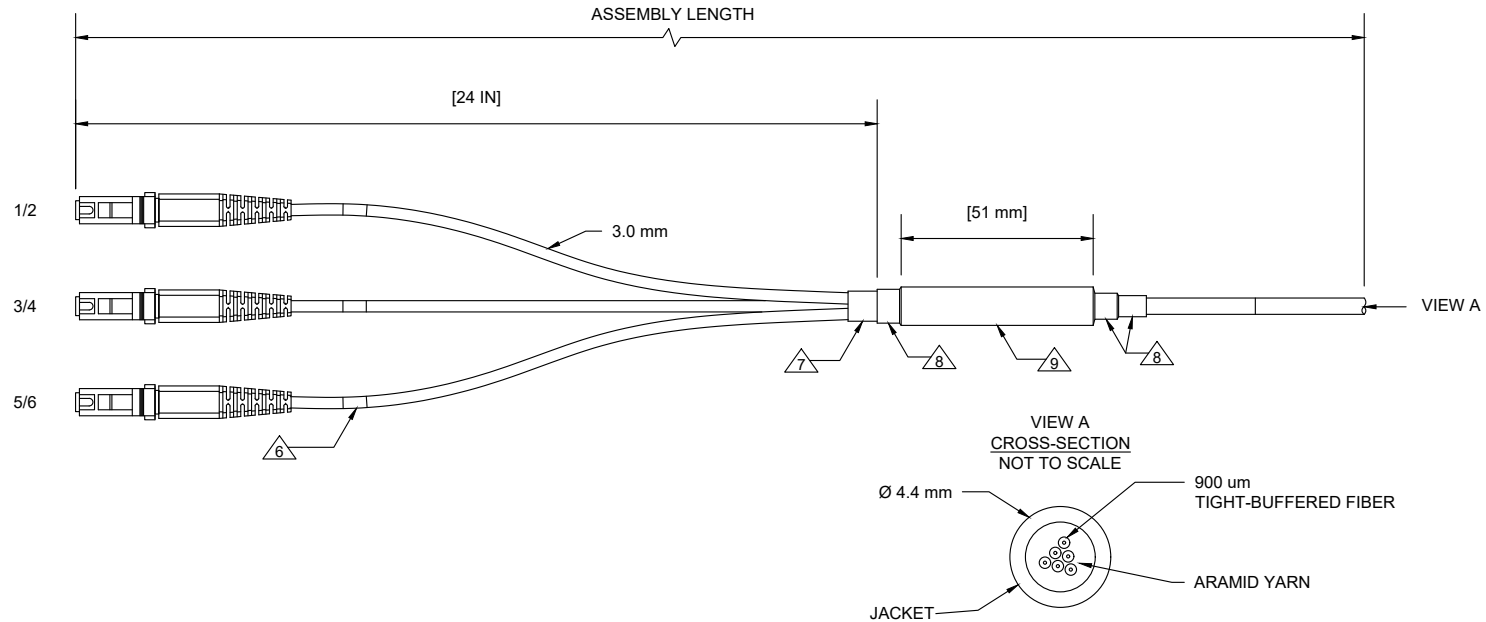

DESCRIPTION: MTRJ-NO PINS PC POLISH / UNTERMINATED, x6-FIBER MULTIMODE OM1 TIGHT BUFFER OFNR INDOOR CABLE, 24 INCH 2>1 BREAKOUT.					
DRAWN BY:	K. THOMAS	09/12/2018	 C-ENTERPRISES <i>Connecting Today's Infrastructures</i>		
APVD BY:	A. JENSEN	09/12/2018			
DIMENSIONS: METRIC [IMPERIAL]			TITLE: MTRJ-NO PINS/ UNTERM. x6-FIBER OM1 OFNR ASM		
PROPRIETARY AND CONFIDENTIAL			SIZE	DWG. NO.	REV
THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION OF C ENTERPRISES. NOT TO BE USED, COPIED, OR DISCLOSED WITHOUT WRITTEN PERMISSION. ALL RIGHTS RESERVED.			A	MPRI06MJXXEXXPX	A
SCALE: NOT TO SCALE				SHEET 1 OF 1	

BILL OF MATERIALS		
ITEM	QTY	COMPONENT
3	1	2 FIBERS PER LEG BREAKOUT: 3 mm FIBER LEGS, ORANGE, 24 IN.
2	AR	MULTIMODE OM1 6-FIBER TB OFNR INDOOR PREMISE CABLE; ORANGE: PERFORMA.
1	3	MTRJ-NO PINS PC POLISH, BLACK HOUSING, BLACK BOOT: PERFORMA.

MT PC TEST LIMITS AT 1300 nm.			
MAX. I.L.	TYP. I.L.	MIN. R.L.	TYP. R.L.
≤0.75dB	0.35dB	N/A	N/A