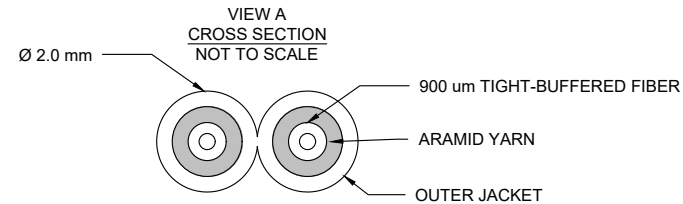
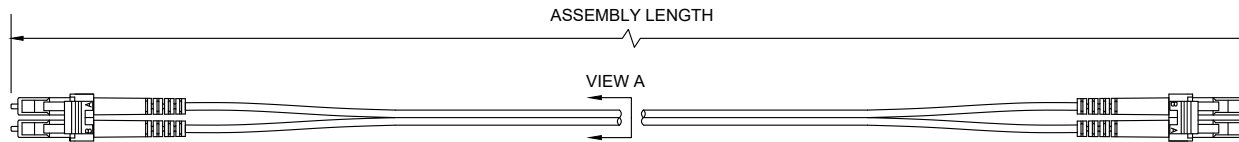











NOTES: UNLESS OTHERWISE SPECIFIED

1. MATERIALS AND COMPONENTS ARE RoHS/REACH COMPLIANT.
2. ASSEMBLY MEET THE REQUIREMENTS OF ANSI/TIA 568-C.3.
3. 100% TESTED FOR OPTICAL PERFORMANCE, END FACE CRITERIA AND CLEANLINESS.
4. TESTED TO CORNING REQUIREMENTS FOR INSERTION LOSS AND RETURN LOSS.
5. CABLE ASSEMBLIES ARE MANUFACTURED TO C ENTERPRISES STANDARDS.
6. STANDARDS AND SPECIFICATIONS AVAILABLE UPON REQUEST.
7. DRAWING DEPICTS A DUPLEX CORNING LC CLIPPED/LC CLIPPED PATCH CORD ASSEMBLY.
8. REFER TO SALES FOR FURTHER DETAILS.

REV	ECR	DESCRIPTION	BY	DATE	CHECKED
A	-	INITIAL RELEASE	K.T.	07/18/2017	A.J.



LC 	SC 
LC CLIPPED 	SC CLIPPED 
LC UNIBOOT 	MTRJ 
FC 	ST 

ASSEMBLY OPTIONS		DESCRIPTION: SIMPLEX OR DUPLEX PATCH CORD, CORNING COMPONENTS			
CONNECTORS: LC*, LC UNIBOOT, SC*, FC, ST, MTRJ, UNTERMINATED END		DRAWN BY:	K. THOMAS	07/18/2017	 <p>C ENTERPRISES 2445 CADES WAY VISTA CA 92081 760-599-5111</p>
CONNECTOR POLISH: UPC, APC, PC		APVD BY:	A. JENSEN	07/18/2017	
FIBER MODE: SINGLE-MODE, OM1, OM2, OM3, OM4		DIMENSIONS: METRIC [IMPERIAL]			TITLE: CORNING GOLD ASSEMBLIES
CABLE JACKET RATING: OFNR, OFNP, LSZH		PROPRIETARY AND CONFIDENTIAL			SIZE
CABLE: 1.6 mm, 2.0 mm, 3.0 mm. SIMPLEX OR DUPLEX		THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION OF C ENTERPRISES. NOT TO BE USED, COPIED, OR DISCLOSED WITHOUT WRITTEN PERMISSION. ALL RIGHTS RESERVED.			DWG. NO.
POLARITY: CROSS-OVER (A-B, B-A), STRAIGHT (A-A,B-B)		SCALE: NOT TO SCALE			REV
* CLIPPED DUPLEX OPTION AVAILABLE		SHEET 1 OF 1			A