



RET Control Cables

Remote Electrical Tilt (RET) Applications

Male to female

AISG compliant
(Antenna Interface Standards Group)

Weatherproof

Compatible with Andrew, Kathrein, Huawei, RFS and other brands

RoHS compliant




TECHNICAL SPECIFICATIONS

Connectors	1 x 8 pin IEC 60130-9 male 1 x 8 pin IEC 60130-9 female
Construction	Shielded 3 x 20 AWG 2 X 24 AWG (twisted pair, RS-485-A and -B)
Protection Class	IP67 (mated)
Rated Current	5 A
Temperature Range	-40°C / 80°C
Materials	RoHS compliant

PRODUCT PORTFOLIO

Length: Meters	Part Number
0.5	RF-RET-5M
1	RF-RET-1M
2	RF-RET-2M
3	RF-RET-3M
4	RF-RET-4M
5	RF-RET-5M
6	RF-RET-6M
7	RF-RET-7M
8	RF-RET-8M
9	RF-RET-9M
10	RF-RET-10M
15	RF-RET-15M
20	RF-RET-20M
30	RF-RET-30M
40	RF-RET-40M
50	RF-RET-50M
60	RF-RET-60M
70	RF-RET-70M
80	RF-RET-80M
85	RF-RET-85M
90	RF-RET-90M
100	RF-RET-100M

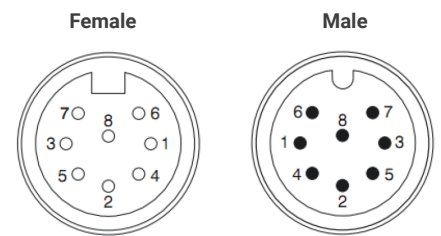

PIN ASSIGNMENT

1. +12V DC
2. not used
3. RS485 B
4. not used
5. RS485 A
6. +24V DC
7. DC return
8. not used

RF Industries

(NASDAQ: RFI)

16868 Via Del Campo Court
Suite 200
San Diego, CA 92126

(800) 233-1728

(858) 549-6340

Fax: (858) 549-6345

rfi@rfindustries.com

www.rfindustries.com

Note: Specifications subject to change without notice

Revision 6 | July 2024