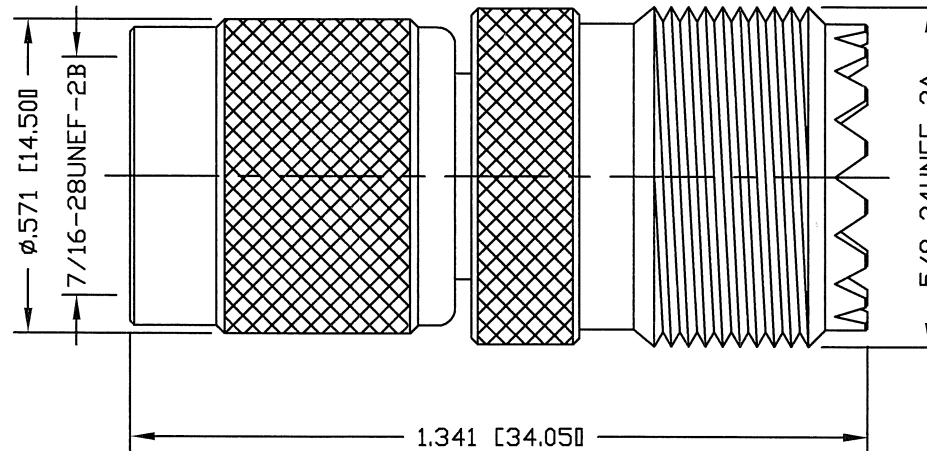


PART NO.

**RFT-1235**

REV	DESCRIPTION	ECO/ECN	DATE	APPROVED
E	UPDATED ADAPTER DIMENSIONS & DWG FORMAT	1042	07/10/24	JDM

**SPECIFICATIONS:**

IMPEDANCE: NON CONSTANT  
 FREQUENCY RANGE: 0-300 MHz  
 WORKING VOLTAGE: 500 VRMS @ SEA LEVEL

9	COUPLING NUT	1	BRASS	NICKEL
8	GASKET	1	RUBBER	RED
7	RETAINING RING	1	SK85	NICKEL
6	INSULATOR	1	POM	NATURAL
5	WASHER	1	BRASS	NICKEL
4	INSULATOR	1	PTFE	NATURAL
3	PIN	1	BRASS	GOLD
2	INSULATOR	1	PTFE	NATURAL
1	BODY	1	BRASS	NICKEL
#	DESCRIPTION	QTY	MATERIAL	FINISH

CUSTOMER  
OUTLINE DRAWINGALL DIMENSIONS  
ARE REFERENCE ONLYUNLESS OTHERWISE SPECIFIED:  
DIMENSIONS ARE IN INCHES  
AND [MILLIMETERS]

DRAWN	C. ZUÑIGA	07/10/24
CHECKED		
ORJ DRAWN	C. JONES	05/29/92

**RoHS  
COMPLIANT**

PROPRIETARY AND CONFIDENTIAL  
 THIS DRAWING CONTAINS  
 INFORMATION PROPRIETARY TO  
 RF INDUSTRIES, ANY  
 UNAUTHORIZED USE OF THIS  
 DRAWING IS EXPRESSLY  
 PROHIBITED WITHOUT WRITTEN  
 PERMISSION FROM RF  
 INDUSTRIES. ANY VIOLATION IS  
 PUNISHABLE UNDER U.S.  
 COPYRIGHT LAWS.

**RFconnectors**  
 DIVISION OF RF INDUSTRIES, LTD. SAN DIEGO, CALIFORNIA

RFINDUSTRIES.COM  
 (858) 549-6340  
 RFI@RFINDUSTRIES.COM

**TNC MALE TO UHF FEMALE  
 ADAPTER**

DWG #

**RFT-1235**

CABLE GROUP	CONTROL #	SCALE	FORMAT	SHEET	REVISION
N/A	000000	NTS	A	1 OF 1	E