

PART NO.

RP-1226-I

REV

DESCRIPTION

ECO/ECN

DATE






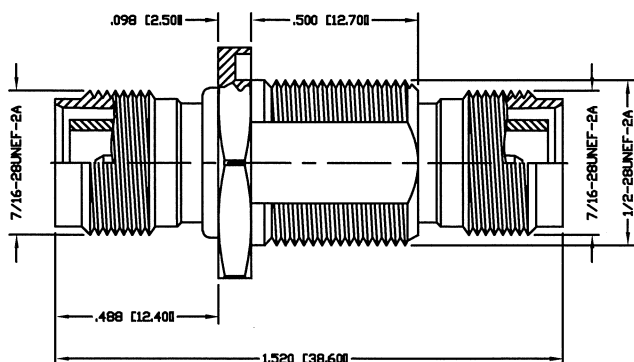
APPROVED

A1

UPDATED DWG

09/16/25

JDM

**SPECIFICATIONS:**

IMPEDANCE: 50 Ohms

FREQUENCY RANGE: 0-7 GHz

WORKING VOLTAGE: 500 V rms Max. @ Sea Level

INSULATION RESISTANCE: >5k M Ohms min.

TEMPERATURE RANGE: -65°C TO 165°C

RECOMMENDED MOUNTING HOLE

10	HEX NUT	1	BRASS	NICKEL
9	WASHER	1	IRON	NICKEL
8	GASKET	1	RUBBER	RED
7	PRESS WASHER	1	BRASS	NICKEL
6	INSULATOR	1	PTFE	NATURAL
5	INSULATOR	2	PTFE	NATURAL
4	PIN	1	BRASS	GOLD
3	BODY	1	BRASS	NICKEL
2	BODY	1	BRASS	NICKEL
1	BODY	1	BRASS	NICKEL
#	DESCRIPTION	QTY	MATERIAL	FINISH

**CUSTOMER
OUTLINE DRAWING**ALL DIMENSIONS
ARE REFERENCE ONLYUNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN INCHES
AND [MILLIMETERS]

DRAWN	C. ZUÑIGA	09/16/25
CHECKED		
ORJ DRAWN	C. ZUÑIGA	05/03/16

**RoHS
COMPLIANT**

PROPRIETARY AND CONFIDENTIAL

THIS DRAWING CONTAINS
INFORMATION PROPRIETARY TO
RF INDUSTRIES. ANY
UNAUTHORIZED USE OF THIS
DRAWING IS EXPRESSLY
PROHIBITED WITHOUT WRITTEN
PERMISSION FROM RF
INDUSTRIES. ANY VIOLATION IS
PUNISHABLE UNDER U.S.
COPYRIGHT LAWS.

RFconnectors

DIVISION OF RF INDUSTRIES, LTD. SAN DIEGO, CALIFORNIA

RFINDUSTRIES.COM
(858) 549-6340
RFI@RFINDUSTRIES.COM

TNC DOUBLE JACK

REVERSE POLARITY, BULKHEAD, ISOLATED

DWG #

RP-1226-I

CABLE GROUP	CONTROL #	SCALE	FORMAT	SHEET	REVISION
N/A	000000	NTS	A	1 OF 1	A1