
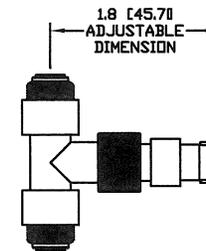
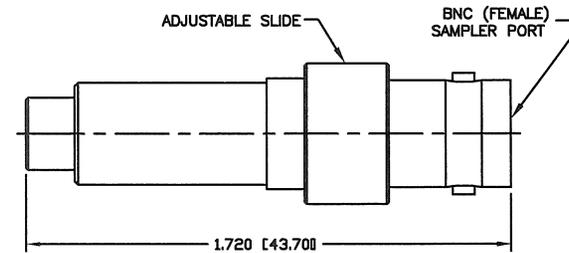


PART NO.

RFA-4059-A1

REV	DESCRIPTION	ECO/ECN	DATE	APPROVED
B	UPDATED DWG FORMAT	1021	10/10/23	JDM

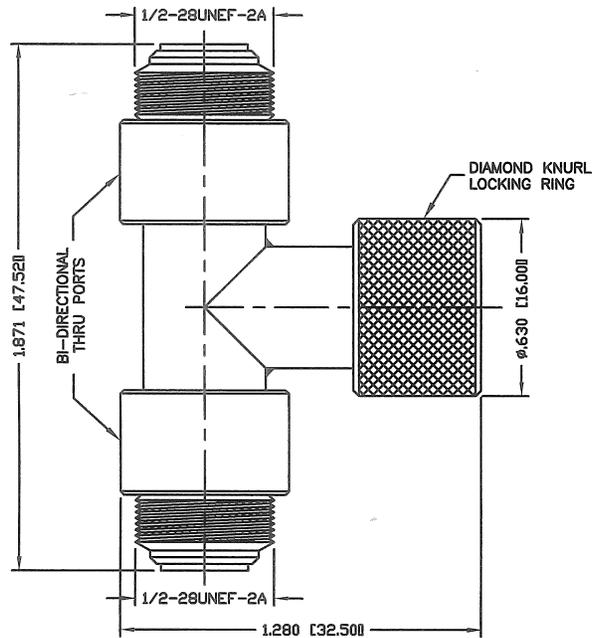

NOT TO SCALE

SPECIFICATIONS:

IMPEDANCE: 50 Ohms
 FREQUENCY RANGE: 50 MHz - 3 GHz
 VSWR MAX: 1.3:1 @ 0-3 GHz
 ATTENUATION RANGE 20~80 dB TO 3 GHz
 POWER RATING CONTINUOUS: 500 Watts
 WORKING VOLTAGE: DEPENDING ON UNIDAPT END USED -
 335 - 1000 VRMS @ SEA LEVEL
 INSERTION LOSS: $\leq .2$ dB W/SAMPLING PORT REMOVED

11	SHELL	1	BRASS	SILVER
10	INSULATOR	1	PTFE	NATURAL
9	INSULATOR	1	PTFE	NATURAL
8	CONTACT	1	BRASS	GOLD
7	BNC PRESS BODY	1	BRASS	SILVER
6	BNC BODY	1	BRASS	SILVER
5	BODY	1	BRASS	SILVER
4	INSULATOR	2	PTFE	NATURAL
3	CONTACT	1	PHOSPHOR BRONZE	GOLD
2	UNIDAPT PRESS FIT	2	BRASS	SILVER
1	UNIDAPT BODY	1	BRASS	SILVER
#	PART NUMBER	QTY	DESCRIPTION	FINISH

CUSTOMER
OUTLINE DRAWINGALL DIMENSIONS
ARE REFERENCE ONLYUNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN INCHES
AND [MILLIMETERS]DRAWN
C. ZUÑIGA 10/10/23

CHECKED

ORJ DRAWN
C. ZUÑIGA 10/10/23**RoHS
COMPLIANT**

PROPRIETARY AND CONFIDENTIAL

THIS DRAWING CONTAINS
 INFORMATION PROPRIETARY TO
 RF INDUSTRIES, ANY
 UNAUTHORIZED USE OF THIS
 DRAWING IS EXPRESSLY
 PROHIBITED WITHOUT WRITTEN
 PERMISSION FROM RF
 INDUSTRIES. ANY VIOLATION IS
 PUNISHABLE UNDER U.S.
 COPYRIGHT LAWS.

RFconnectors

DIVISION OF RF INDUSTRIES, LTD. SAN DIEGO, CALIFORNIA

 RFINDUSTRIES.COM
 (858) 549-6340
 RFI@RFINDUSTRIES.COM
UNIDAPT SAMPLER
ADJUSTABLE RF SIGNAL SAMPLERDWG # **RFA-4059-A1**

CABLE GROUP	CONTROL #	SCALE	FORMAT	SHEET	REVISION
N/A	000000	NTS	A	1 OF 1	B