
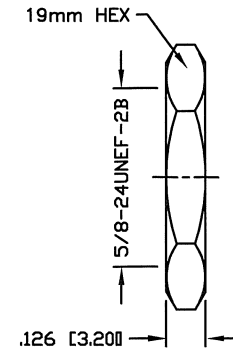
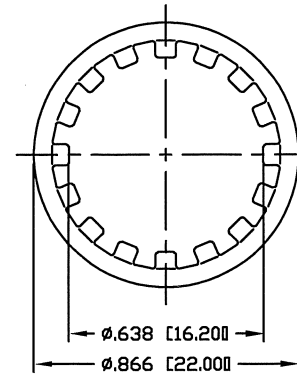

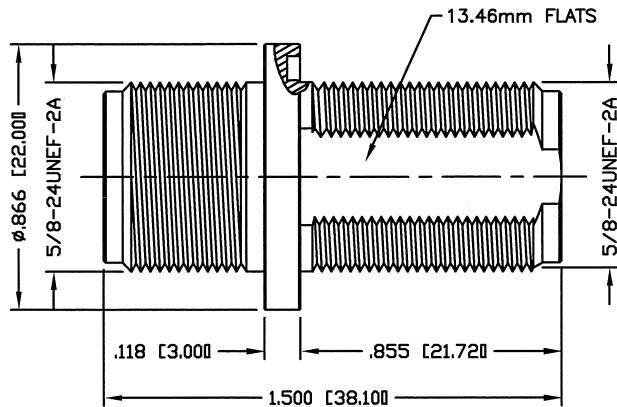


PART NO.

RFN-1023-03

REV	DESCRIPTION	ECO/ECN	DATE	APPROVED
A	UPDATED SPECS	1083	05/22/26	JDM

**SPECIFICATIONS:**

IMPEDANCE: 50 Ohms
 FREQUENCY RANGE: 0-11 GHz
 3rd ORDER IM: ≤ -155 dBc @ 700 MHz
 3rd ORDER IM TEST METHOD: 2x43dBm CARRIERS
 WORKING VOLTAGE: 1000 V rms Max. @ Sea Level
 TEMPERATURE RANGE: -65°C TO 165°C
 COMPLIANCE: IP68 WHEN MATED

#	DESCRIPTION	QTY	MATERIAL	FINISH
7	HEX NUT	1	BRASS	CuSnZn
6	LOCK WASHER	1	BRASS	CuSnZn
5	O-RING	1	NITRILE BUNA	BLACK
4	GROUND RING	1	BRASS	CuSnZn
3	CONTACT	1	PHOSPHOR BRONZE	GOLD
2	INSULATOR	2	PTFE	NATURAL
1	BODY	1	BRASS	CuSnZn

CUSTOMER
OUTLINE DRAWINGALL DIMENSIONS
ARE REFERENCE ONLYUNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN INCHES
AND [MILLIMETERS]

DRAWN	C. ZUÑIGA	05/22/26
CHECKED		
ORJ DRAWN	C. ZUÑIGA	03/30/23

**RoHS
COMPLIANT**

PROPRIETARY AND CONFIDENTIAL
 THIS DRAWING CONTAINS
 INFORMATION PROPRIETARY TO
 RF INDUSTRIES, ANY
 UNAUTHORIZED USE OF THIS
 DRAWING IS EXPRESSLY
 PROHIBITED WITHOUT WRITTEN
 PERMISSION FROM RF
 INDUSTRIES. ANY VIOLATION IS
 PUNISHABLE UNDER U.S.
 COPYRIGHT LAWS.

RFconnectors

DIVISION OF RF INDUSTRIES, LTD. SAN DIEGO, CALIFORNIA

RFINDUSTRIES.COM
(858) 549-6340
RFI@RFINDUSTRIES.COM**N FEMALE TO N FEMALE
BULKHEAD ADAPTER**

DWG #

RFN-1023-03

CABLE GROUP	CONTROL #	SCALE	FORMAT	SHEET	REVISION
N/A	000000	NTS	A	1 OF 1	A