




PART NO.

RSA-3050-C2


REV	DESCRIPTION	ECO/ECN	DATE	APPROVED
A	UPDATED CONNECTOR IMAGE AND DWG FORMAT	1086	07/14/26	JDM

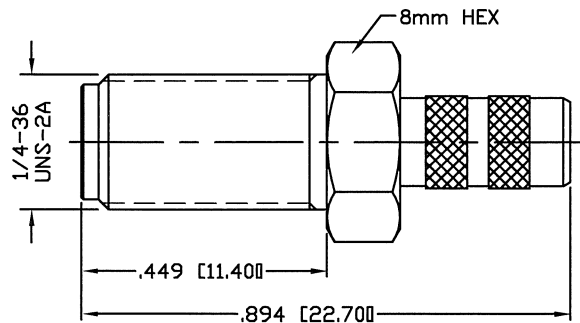

PIN TO BE SOLDERED



RECOMMENDED CRIMP DIE: 213'

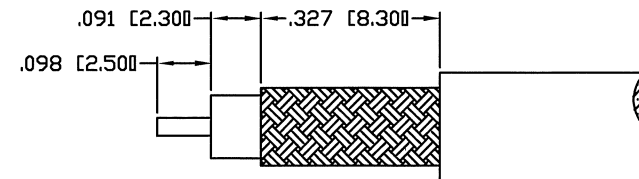

RECOMMENDED STRIPPING DIMENSIONS

SPECIFICATIONS:

IMPEDANCE: 50 Ohms
 FREQUENCY RANGE: 0-12.4 GHz
 WORKING VOLTAGE: 500 V rms Max. @ Sea Level
 VSWR MAX: 1.3
 INSULATION RESISTANCE: 5k M Ohms min.
 TEMPERATURE RANGE: -65°C TO 165°C
 FOR TIMES LMR-200, ALPHA 9848 & MSI-22

4	FERRULE	1	BRASS	NICKEL
3	CONTACT	1	BeCu	GOLD
2	INSULATOR	1	PTFE	NATURAL
1	BODY	1	BRASS	NICKEL
#	DESCRIPTION	QTY	MATERIAL	FINISH

CUSTOMER OUTLINE DRAWING	
ALL DIMENSIONS ARE REFERENCE ONLY	
UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES AND [MILLIMETERS]	
DRAWN C. ZUÑIGA	07/14/26
CHECKED	
ORJ DRAWN C. ZUÑIGA	03/03/03

**RoHS
COMPLIANT**

PROPRIETARY AND CONFIDENTIAL
 THIS DRAWING CONTAINS
 INFORMATION PROPRIETARY TO
 RF INDUSTRIES, ANY
 UNAUTHORIZED USE OF THIS
 DRAWING IS EXPRESSLY
 PROHIBITED WITHOUT WRITTEN
 PERMISSION FROM RF
 INDUSTRIES. ANY VIOLATION IS
 PUNISHABLE UNDER U.S.
 COPYRIGHT LAWS.

RFconnectors
 DIVISION OF RF INDUSTRIES, LTD. SAN DIEGO, CALIFORNIA
 RFINDUSTRIES.COM
 (858) 549-6340
 RF@RFINDUSTRIES.COM

SMA FEMALE CRIMP

DWG # RSA-3050-C2					
CABLE GROUP	CONTROL #	SCALE	FORMAT	SHEET	REVISION
C2	000000	NTS	A	1 OF 1	A