
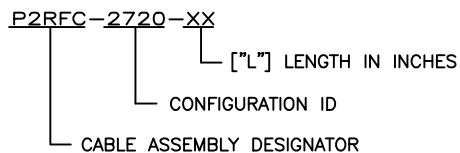


PART NO.		<b>P2RFC-2720-XX</b>		
REV	DESCRIPTION	DWN	DATE	APPROVED
-	ENGINEERING RELEASE	CZS	05/09/19	JDMc

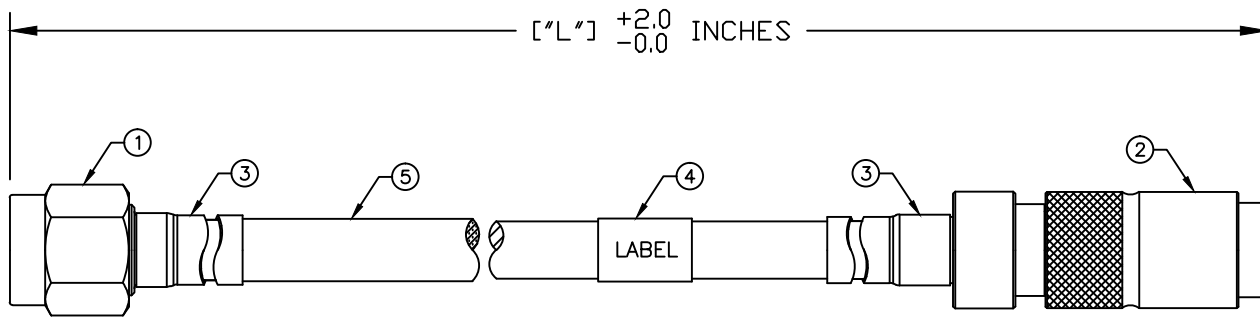

- STANDARD CABLE LENGTHS ["L"]:
- 12 [1 FOOT]
  - 24 [2 FEET]
  - 36 [3 FEET]
  - 48 [4 FEET]
  - 60 [5 FEET]
  - 72 [6 FEET]

FOR CUSTOM LENGTHS REPLACE XX FOR NUMBER OF INCHES

**SPECIFICATIONS:**

IMPEDANCE: 50 Ohms  
 FREQUENCY RANGE: 0-6 GHz  
 3RD ORDER IM: ≤-155 dBc @ 700MHz & 1900MHz  
 3RD ORDER IM TEST METHOD: 2x43dBm CARRIERS

NOTE: BOTH CONNECTORS WILL HAVE PROTECTIVE CAPS ON

5	CBL-TFT-402LF	1	.141 SEMI FLEX PLENUM	---
4	THT-64-427-3	1	LABEL	---
3	ST-P0250A-K	2	TUBING	HEAT SHRINK
2	RF123-7003-4SR2	1	1.0/2.3 PLUG CONNECTOR	WHITE BRONZE
1	RSA-3500-SR2LP	1	SMA PLUG CONNECTOR	WHITE BRONZE
#	PART NUMBER	QTY	DESCRIPTION	FINISH

CUSTOMER OUTLINE DRAWING	
ALL DIMENSIONS ARE REFERENCE ONLY	
UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES AND [MILLIMETERS]	
DRAWN C. ZUNIGA	05/09/19
CHECKED	
ORJ DRAWN C. ZUNIGA	05/09/19

PROPRIETARY AND CONFIDENTIAL

THIS DRAWING CONTAINS INFORMATION PROPRIETARY TO RF INDUSTRIES, ANY UNAUTHORIZED USE OF THIS DRAWING IS EXPRESSLY PROHIBITED WITHOUT WRITTEN PERMISSION FROM RF INDUSTRIES. ANY VIOLATION IS PUNISHABLE UNDER U.S. COPYRIGHT LAWS.

RF

connectors

7610 MIRAMAR RD.  
 SAN DIEGO, CA 92126  
 (858) 549-6340  
 DIVISION OF RF INDUSTRIES, LTD. (858) 549-6345 FAX

## SMA PLUG TO 1.0/2.3 PLUG

TFT-402 PLENUM CABLE ASSEMBLY

SIZE A	CABLE GROUP -	DWG NO. <b>P2RFC-2720-XX</b>	REV -
SCALE: NTS	ENGINEERING ID: 000000	SHEET 1 OF 1	