




NOTES: UNLESS OTHERWISE SPECIFIED

1. MATERIALS AND COMPONENTS ARE RoHS/REACH COMPLIANT.
2. CONNECTORS MEET THE REQUIREMENTS OF ANSI/TIA 568-C.3
3. 100% TESTED FOR OPTICAL PERFORMANCE, END FACE CRITERIA AND CLEANLINESS.
4. CABLE ASSEMBLIES ARE MANUFACTURED TO C ENTERPRISES STANDARDS.
5. STANDARDS AND SPECIFICATIONS AVAILABLE UPON REQUEST.
6.  HEAT SHRINK.

REV	ECR	DESCRIPTION	BY	DATE	CHECKED
A	-	INITIAL RELEASE	M. K	02/28/2019	A.J.

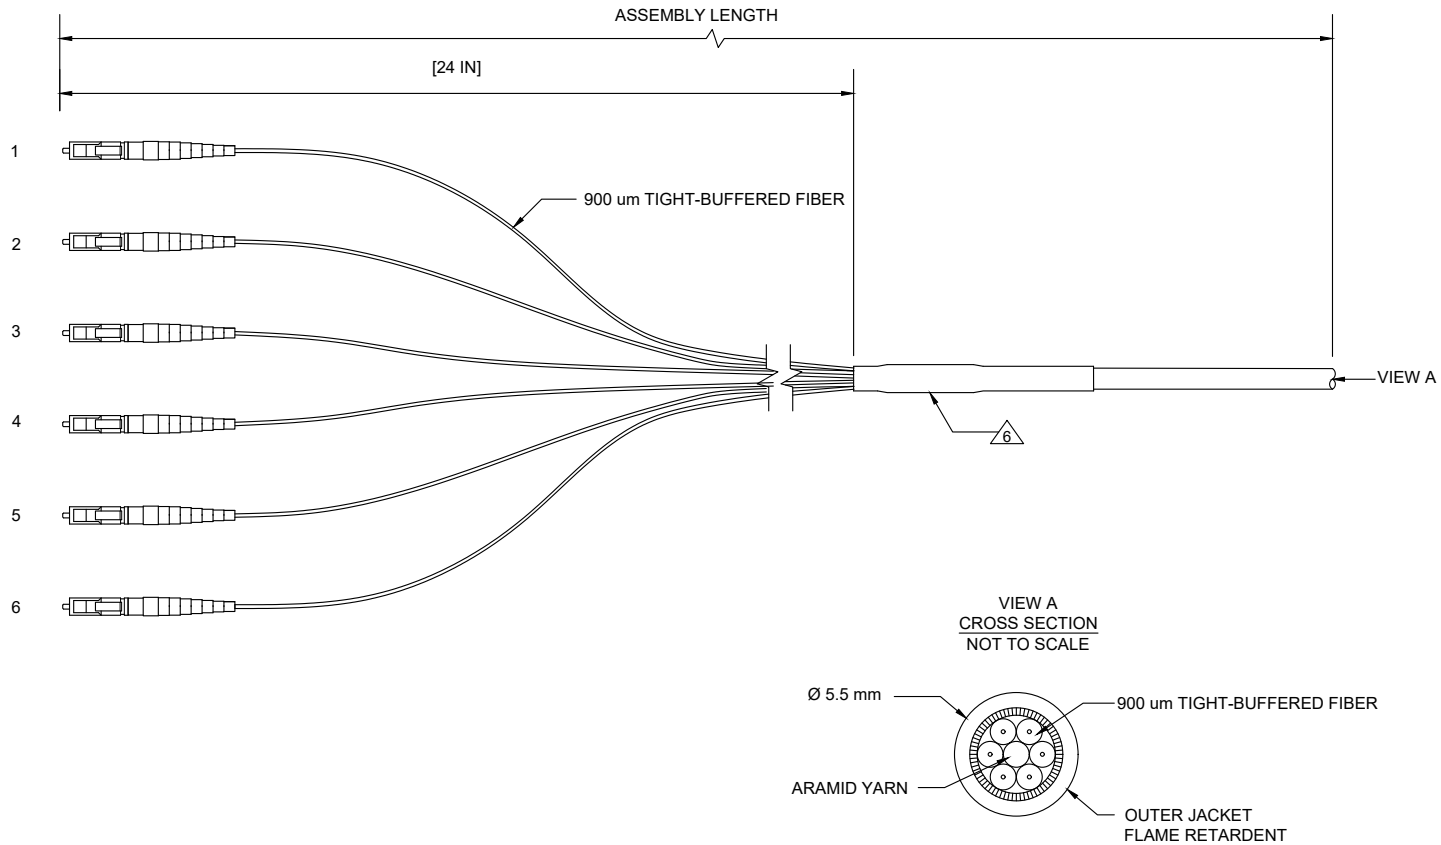

DESCRIPTION:		LC-UNCLIPPED UPC POLISH / UNTERM., x6 FIBER SINGLE-MODE MIC® OFNR CABLE, 900 um BREAKOUT, ULTRA.			
DRAWN BY:	M. KHANFIR	02/28/2019	 C ENTERPRISES 2445 CADES WAY VISTA CA 92081 760-599-5111		
APVD BY:	A. JENSEN	02/28/2019			
DIMENSIONS: METRIC [IMPERIAL]			TITLE: LC-UPC/UNTERM OS2 OFNP 6 FIBER ASM.		
PROPRIETARY AND CONFIDENTIAL			SIZE	DWG. NO.	REV
THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION OF C ENTERPRISES. NOT TO BE USED, COPIED, OR DISCLOSED WITHOUT WRITTEN PERMISSION. ALL RIGHTS RESERVED.			A	SURI06LBXX9XXUX	A
SCALE: NOT TO SCALE				SHEET 1 OF 1	

BILL OF MATERIALS		
ITEM	QTY	PRODUCT
2	AR	SINGLE-MODE OS2 MIC® OFNR 06 FIBER CABLE; YELLOW: CORNING.
1	6	LC-UNCLIPPED UPC POLISH; BLUE HOUSING, BLUE BOOT: CORNING.

ASSEMBLY UPC TEST LIMITS AT 1310 nm			
MAX. I.L.	TYP. I.L.	MIN. R.L.	TYP. R.L.
≤0.50dB	0.20dB	≥50dB	60dB