

PART NO.

P2RFC-2269-XX

REV

DESCRIPTION

DWN

DATE

APPROVED


A

UPDATED DWG AND SPECS

CZS

03/19/21

JDMc

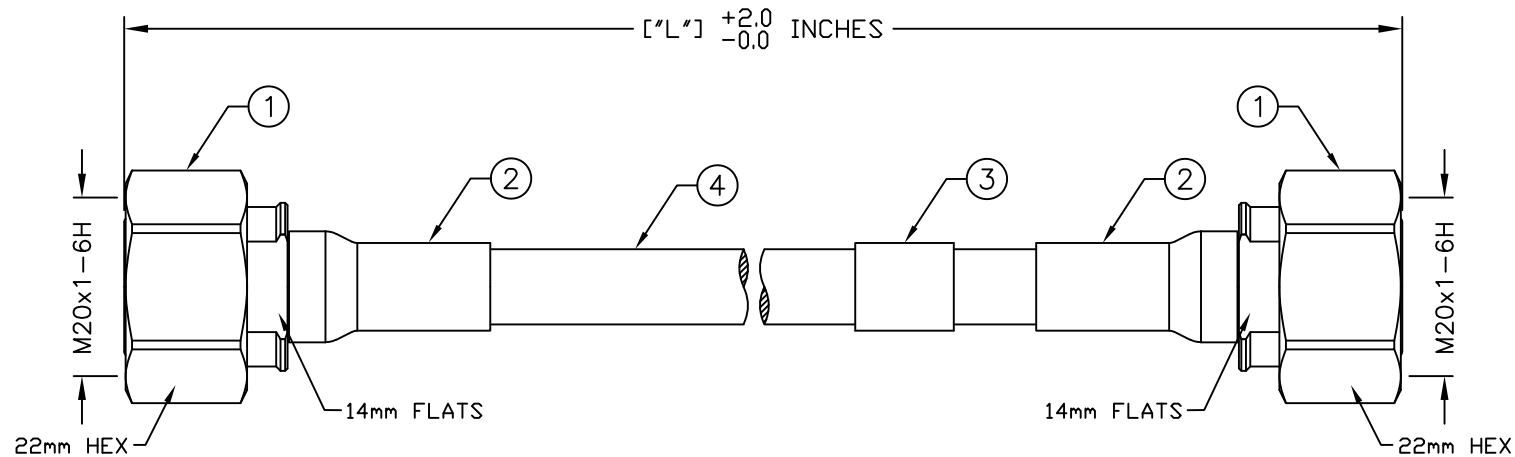

P2RFC-2269-XX

[\"L\"] LENGTH IN INCHES

CONFIGURATION ID

CABLE ASSEMBLY DESIGNATOR

STANDARD CABLE LENGTHS [\"L\"]:

-12 [1 FOOT]
 -24 [2 FEET]
 -36 [3 FEET]
 -48 [4 FEET]
 -60 [5 FEET]
 -72 [6 FEET]

FOR CUSTOM LENGTHS REPLACE XX
 FOR NUMBER OF INCHES

SPECIFICATIONS:

IMPEDANCE: 50 Ohms
 FREQUENCY RANGE: 0-6 GHz
 3RD ORDER IM: ≤ -161 dBc @ 700 MHz & 1900 MHz
 3RD ORDER IM TEST METHOD: 2x43 dBm CARRIERS
 VSWR: $\leq 1.15:1$ THRU 3 GHz

NOTE: BOTH CONNECTORS WILL HAVE PROTECTIVE CAPS ON

4	ECBL-SPP-250LLPL	1	1/4" CORRUGATED CABLE	BLUE
3	THT-64-427-3	1	BRADY LABEL	VINYL
2	ST-P0375A-K	2	HEAT SHRINK TUBING	BLACK
1	RFD-43MS-HPL	2	4.3/10 MALE CONNECTOR	CuSnZn
#	PART NUMBER	QTY	DESCRIPTION	FINISH

CUSTOMER OUTLINE DRAWING	
ALL DIMENSIONS ARE REFERENCE ONLY	
UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES AND [MILLIMETERS]	
DRAWN C. ZUÑIGA	03/19/21
CHECKED	
ORJ DRAWN C. ZUÑIGA	01/17/17

RoHS COMPLIANT	
PROPRIETARY AND CONFIDENTIAL THIS DRAWING CONTAINS INFORMATION PROPRIETARY TO RF INDUSTRIES, ANY UNAUTHORIZED USE OF THIS DRAWING IS EXPRESSLY PROHIBITED WITHOUT WRITTEN PERMISSION FROM RF INDUSTRIES. ANY VIOLATION IS PUNISHABLE UNDER U.S. COPYRIGHT LAWS.	

RFconnectors		7610 MIRAMAR RD. SAN DIEGO, CA 92126 (858) 549-6340	
DIVISION OF RF INDUSTRIES, LTD.		(858) 549-6345 FAX	
4.3/10 MALE TO 4.3/10 MALE 1/4" FLEXIBLE PLENUM CABLE ASSEMBLY			
SIZE A	CABLE GROUP HPL	DWG NO. P2RFC-2269-XX	REVISION A
SCALE: NTS	ENGINEERING ID: 000000		SHEET 1 OF 1